



► SES09




Regulacja:
Pionowa: 180°

► SES10




Regulacja:
Pozioma: 180°
Pionowa: 180°

► SES12-A



Regulacja:
Pozioma: 180°

► SES15

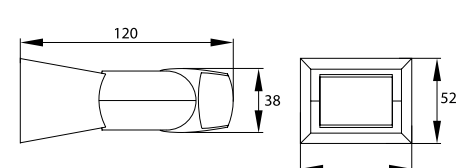

Regulacja:
Pionowa: 180°
Pozioma: 60°



SES09
regulacja czujnika



SES10
regulacja czujnika



SES12
regulacja czujnika



SES15
regulacja czujnika



kod
B50-SES09BL
B50-SES09WH
B50-SES10BL
B50-SES10WH
B50-SES12BL-A
B50-SES12WH-A
B50-SES15BL
B50-SES15WH

EAN
5908311361276
5908311361269
5908311361283
5908311361290
5900280914347
5900280914323
5900280908650
5900280908667

opakowanie
1/50
1/50
1/50
1/50
1/50
1/50
1/50
1/50

kolor
czarny
biały
czarny
biały
czarny
biały
czarny
biały

sposób regulacji
time / lux
time / lux
time / lux / sens
time / lux / sens
time / lux
time / lux
time / lux
time / lux

typ czujnika
PIR (podczerwień)
PIR (podczerwień)
PIR (podczerwień)
PIR (podczerwień)
PIR (podczerwień)
PIR (podczerwień)
PIR (podczerwień)
PIR (podczerwień)

zakres detekcji
180°x 90°; max. 12m
180°x 90°; max. 12m
180°x 90°; max. 12m
180°x 90°; max. 12m
180°x 120°; max. 12m
180°x 120°; max. 12m
180°x 120°; max. 12m
180°x 120°; max. 12m

moc [W] (żarowe / CFL lub LED)
1200 / 300
1200 / 300
1200 / 300
1200 / 300
800 / 400
800 / 400
1200 / 300
1200 / 300