


Product End of Life Instructions

Easy UPS 3M 200kVA 400V 3:3 UPS w.CB



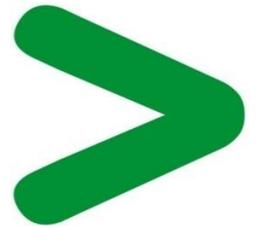


Potential disassembly risks

Hazard of electric shock, explosion or arc flash

The UPS contains an internal energy source. Hazardous voltage can be present even when disconnected from the utility/mains supply. Before installing or servicing the UPS system, ensure that the units are OFF and that utility/mains and batteries are disconnected. Wait five minutes before opening the UPS to allow the capacitors to discharge.



End of Life Instructions

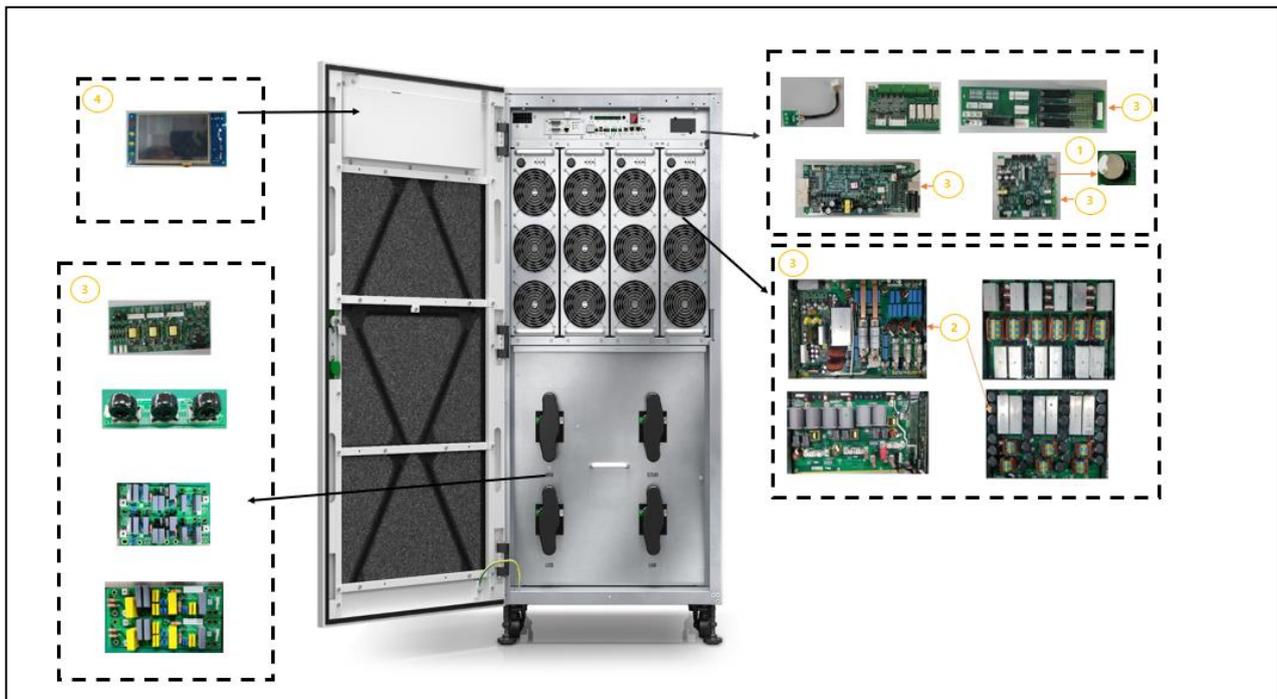

Recommendation	Number on drawing	Component / Material	Weight (in g)	Comment
To be depolluted	1	Other battery	3	1 x coin batteries
To be depolluted	2	Electrolyte capacitors which size: height > 25 mm, diameter > 25 mm or proportionately similar volume	2216.6	28 x large electrolytic capacitors
To be depolluted	3	Electronic Board > 10cm ²	20375.43	22 X PCBs >10cm ²
To be depolluted	4	LCD (surface > 100cm ²) and all those back-lighted with gas discharge lamps	195.6	1 X LCD >100cm ²

*Not all batteries, capacitors and PCBAs are pictured here. Power batteries for the UPS system are in separate battery cabinet(s) not addressed by this document.



Product description

Manufacturer identification	Schneider Electric Industries SAS
Brand name	Schneider Electric
Product function	The Schneider Electric Easy UPS 3M is an easy-to-install, easy-to-connect, easy-to-use, and easy-to-service 60-200KVA 3 phase UPS for small and medium data centers and other business critical applications.
Product reference	E3MUPS200KH
Total representative product mass	305800 g
Representative product dimensions	2102mm x 750mm x 1125mm
Date of information release	05/2022



Additional information

Legal information	This product family is in the scope of European Union directive 2012/19/EU on Waste Electrical and Electronic Equipment (WEEE). The product family must be disposed according to the legislation of the country. This document is intended for use by end of life recyclers or treatment facilities. It provides the basic information to assure an appropriate end of life treatment for the components and materials of the product.	
Recyclability potential	74%	Based on "ECO'DEEE recyclability and recoverability calculation method" (version V1, 20 Sep. 2008 presented to the French Agency for Environment and Energy Management: ADEME).

Schneider Electric Industries SAS
Country Customer Care Center
<http://www.schneider-electric.com/contact>
35, rue Joseph Monier
CS 30323
F- 92506 Rueil Malmaison Cedex
RCS Nanterre 954 503 439
Capital social 896 313 776 €

www.schneider-electric.com

ENVEOLI2204008_V1

Published by Schneider Electric

© 2019 - Schneider Electric – All rights reserved

05/2022