Product Environmental Profile

MILUZ ED SOCKET OUTLET SIDE EARTH SCREW SHUTTER







General information

Representative product MILUZ ED SOCKET OUTLET SIDE EARTH SCREW SHUTTER - WDE012P01


Description of the product

The main function of Miluz ED SO is to connect/dissconnect the plug of a load protecting user from direct contact.

Functional unit

To connect/disconnect during 20 years the plug of a load consuming 16A under a voltage of 250V while protecting the user from direct contact with live parts and with a protection class IP 20.

Constituent materials

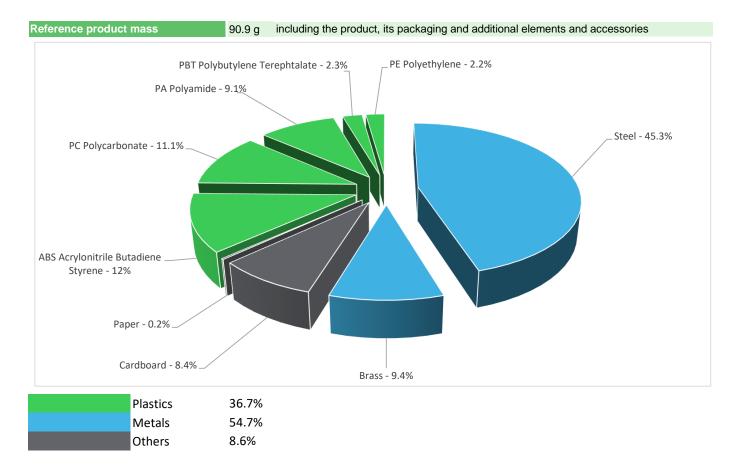

E | Substance assessment

Products of this range are designed in conformity with the requirements of the RoHS directive (European Directive 2011/65/EU of 2 January 2013, amended in March 2015, 2015/863/EU and in November 2017, 2017/2102/EU) and do not contain, or only contain in the authorised proportions, lead, mercury, cadmium, hexavalent chromium or flame retardants (polybrominated biphenyls - PBB, polybrominated diphenyl ethers – PBDE), Bis (2-ethylhexyl)phthalate - DEHP, Benzyl butyl phthalate - BBP, Dibutyl phthalate - DBP, Diisobutyl phthalate - DIBP) as mentioned in the Directive.

Details of ROHS and REACH substances information are available on the Schneider-Electric Green Premium website http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page




The MILUZ ED SOCKET OUTLET SIDE EARTH SCREW SHUTTER presents the following relevent environmental aspects					
Manufacturing	Manufactured at a production site complying with the regulations				
Distribution	Weight and volume of the packaging optimized, based on the European Union's packaging directive Packaging weight is 9.8 g, consisting of Cardboard (78.06%), PE film (20.4%), Paper (1.54%) Product distribution optimised by setting up local distribution centres				
Installation	The product does not require special installation procedure and requires little to no energy to install. The disposal of the packaging materials is accounted during the installation phase (including transport to disposal).				
Use	The product does not require special maintenance operations.				
End of life	End of life optimized to decrease the amount of waste and allow recovery of the product components and materials No special end-of-life treatment required. According to countries' practices this product can enter the usual end-of-life treatment process. Based on "ECO'DEEE recyclability and recoverability calculation method" Recyclability potential: (version V1, 20 Sep. 2008 presented to the French Agency for Environment and Energy Management: ADEME).				



Reference life time	20 years					
Product category	Power socket					
Installation elements	No special components needed					
Use scenario	Load rate: 50 % of In Use rate: 50% of the RLT					
Geographical representativeness	Europe					
Technological representativeness	The Modules of Technologies such as material production, manufacturing process and transport technology used in this PEP analysis (LCA-EIME in this case) are Similar and representative of the actual type of technologies used to make the product in production.					
	Manufacturing	Installation	Use	End of life		
Energy model used	Manufacturing Plant: Günsan- Istanbul/Turkey	Electricity grid mix; AC; consumption mix, at consumer; < 1kV; EU-27	Electricity grid mix; AC; consumption mix, at consumer; < 1kV; EU-27	Electricity grid mix; AC; consumption mix, at consumer; < 1kV; EU- 27		

Compulsory indicators		MILUZ ED S	OCKET OUTLET	SIDE EARTH S	CREW SHUTT	TER - WDE01	12P01
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Contribution to mineral resources depletion	kg Sb eq	2.17E-05	2.15E-05	0*	0*	1.79E-07	0*
Contribution to the soil and water acidification	kg SO ₂ eq	9.57E-03	8.99E-04	5.35E-05	0*	8.59E-03	2.41E-05
Contribution to water eutrophication	kg PO ₄ 3- eq	8.11E-04	2.53E-04	1.23E-05	2.06E-05	5.19E-04	6.36E-06
Contribution to global warming	kg CO ₂ eq	2.52E+00	4.26E-01	1.17E-02	1.07E-02	2.06E+00	1.10E-02
Contribution to ozone layer depletion	kg CFC11 eq	1.58E-07	2.29E-08	2.38E-11	2.68E-11	1.34E-07	5.31E-10
Contribution to photochemical oxidation	kg C₂H₄ eq	5.85E-04	1.04E-04	3.82E-06	2.56E-06	4.72E-04	2.55E-06
Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Net use of freshwater	m3	7.48E+00	1.26E-02	0*	0*	7.47E+00	0*
Total Primary Energy	MJ	5.36E+01	1.21E+01	1.66E-01	0*	4.11E+01	1.19E-01

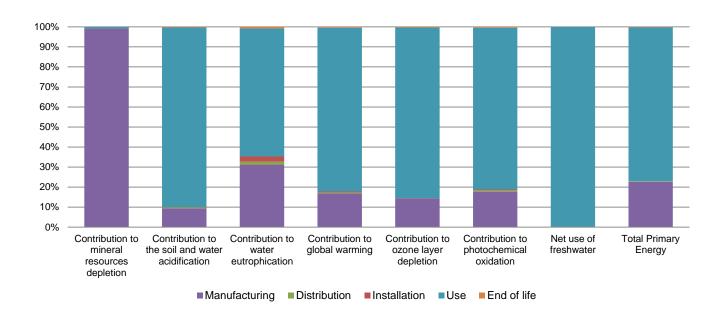

Optional indicators	MILUZ ED SOCKET OUTLET SIDE EARTH SCREW SHUTTER - WDE012P01						
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Contribution to fossil resources depletion	MJ	2.91E+01	5.41E+00	1.65E-01	0*	2.34E+01	9.53E-02
Contribution to air pollution	m³	1.85E+02	9.48E+01	4.99E-01	3.97E-02	8.87E+01	8.51E-01
Contribution to water pollution	m³	2.05E+02	1.17E+02	1.93E+00	5.72E-01	8.50E+01	9.85E-01
Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Use of secondary material	kg	2.19E-02	2.19E-02	0*	0*	0*	0*
Total use of renewable primary energy resources	MJ	5.45E+00	2.21E-01	0*	0*	5.23E+00	0*
Total use of non-renewable primary energy resources	MJ	4.81E+01	1.19E+01	1.66E-01	0*	3.59E+01	1.19E-01
Use of renewable primary energy excluding renewable primary energy used as raw material	MJ	5.45E+00	2.13E-01	0*	0*	5.23E+00	0*
Use of renewable primary energy resources used as raw material	MJ	8.62E-03	8.62E-03	0*	0*	0*	0*
Use of non renewable primary energy excluding non renewable primary energy used as raw material	MJ	4.68E+01	1.06E+01	1.66E-01	0*	3.59E+01	1.19E-01
Use of non renewable primary energy resources used as raw material	MJ	1.28E+00	1.28E+00	0*	0*	0*	0*
Use of non renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*
Use of renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*
Waste categories	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Hazardous waste disposed	kg	1.68E+00	1.57E+00	0*	0*	1.07E-03	1.10E-01
Non hazardous waste disposed	kg	7.75E+00	5.76E-02	0*	7.82E-03	7.68E+00	0*
Radioactive waste disposed	kg	5.16E-03	3.21E-05	0*	0*	5.13E-03	5.70E-07
Other environmental information	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Materials for recycling	kg	6.17E-02	8.87E-03	0*	0*	0*	5.29E-02
Components for reuse	kg	0.00E+00	0*	0*	0*	0*	0*
Materials for energy recovery	kg	3.13E-03	0*	0*	2.00E-03	0*	1.13E-03
Exported Energy	MJ	8.82E-05	2.32E-06	0*	8.59E-05	0*	0*

^{*} represents less than 0.01% of the total life cycle of the reference flow

Life cycle assessment performed with EIME version 5.9.3, database version 2020-12 in compliance with ISO14044.

The use phase is the life cycle phase which has the greatest impact on the majority of environmental indicators (based on compulsory indicators).

Please note that the values given above are only valid within the context specified and cannot be used directly to draw up the environmental assessment of an installation.

Registration number	ENVPEP2205002_V1-EN	Drafting rules	PCR-ed3-EN-2015 04 02
Date of issue	05/2022	Supplemented by	PSR-0005-ed2-EN-2016 03 29
Validity period	5 years	Information and reference documents	www.pep-ecopassport.org

Independent verification of the declaration and data

Internal X External

The elements of the present PEP cannot be compared with elements from another program.

Document in compliance with ISO 14021:2016 « Environmental labels and declarations - Self-declared environmental claims (Type II environmental labelling) »

Schneider Electric Industries SAS
Country Customer Care Center
http://www.schneider-electric.com/contact
35, rue Joseph Monier
CS 30323

F- 92506 Rueil Malmaison Cedex RCS Nanterre 954 503 439 Capital social 896 313 776 €

www.schneider-electric.com Published by Schneider Electric

ENVPEP2205002_V1-EN © 2019 - Schneider Electric – All rights reserved 05/2022