



**Valena Life™
 XLR sockets**

**Cat. Nos: 7 531 73/74
 7 532 73/74
 7 533 73/74**

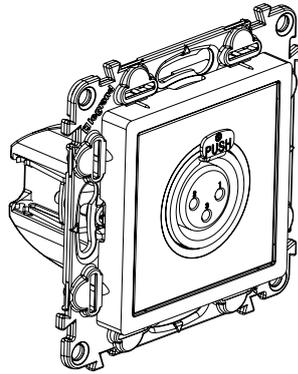

7 531 73 - 7 532 73 - 7 533 73

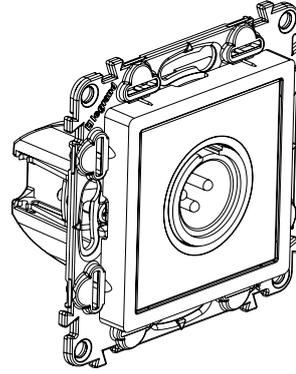

7 531 74 - 7 532 74 - 7 533 74


1. USE

Used for connecting a microphone or a remote console to a booster.
 Stereo audio link for any peripheral device, amp, mixing table, DVD player, camera, video recorder, videoconferencing, etc.



2. RANGE

Description	White	Ivory	Aluminium
Female 3-pin XLR socket	7 531 73	7 532 73	7 533 73
Male 3-pin XLR socket	7 531 74	7 532 74	7 533 74

3. DIMENSIONS (mm)



7 531 73 - 7 532 73 - 7 533 73



7 531 74 - 7 532 74 - 7 533 74

3. DIMENSIONS (mm) continued

Cat. Nos.	A	B	C	D
7 531 73 - 7 532 73 - 7 533 73	74.7	74.7	27.2	13.1
7 531 74 - 7 532 74 - 7 533 74				10.0


4. CONNECTION

Wide terminal block which accommodates conductors 1 mm² max.
 Supplied in a bag containing:
 - 1 Colring cable tie
 - crimping ferrules for conductors < 0.5 mm²
 - thermoformable sheaths
 Cable bending radius: 35 mm

Stripping

Recommended cable: audio cable 2 x 0.22 mm² to 0.40 mm².

- a - Length of sheath to be removed from cable: 30 mm.
 Retain the cable general shielding continuity wire
- b - Remove the shielding braid and aluminium ribbon
- c - Core stripping length: 6 mm.




Wiring

Tools required: 0.4 x 2.5 mm flat screwdriver and long nose pliers.
 Isolate the continuity wire with the neoprene sleeve provided, push it through the ferrule provided and crimp it with the long nose pliers.
 Push the cores through the ferrules provided and crimp them with the long nose pliers.

Start with the continuity wire, then the cores.
 Hold the cable in place mechanically with the cable clamp provided.

Comply with the wiring diagram below:



- 1 - White hot spot
- 2 - GND
- 3 - Red hot spot

5. TECHNICAL CHARACTERISTICS

■ 6.1 Mechanical characteristics

Protection against solid bodies and liquids: IP 40

Protection against impacts: IK 04

■ 6.2 Material characteristics

Casing: Poly gloss appearance

Colour: - White RAL 903
- Ivory RAL 113
- Aluminium

Material: - Plate: ABS/PC
- Cover plate: Polycarbonate/ABS
- Zero halogen
- UV resistant

■ 6.4 Climate characteristics

Storage and operating temperature: -5°C to +35°C

6. CARE

Clean the surface with a cloth.

Do not use acetone, tar-removing cleaning agents or trichloroethylene.

Resistant to the following products: Hexane (EN 60669-1), methylated spirit, soapy water, diluted ammonia, bleach diluted to 10%, window-cleaning products, pre-impregnated wipes.

Caution: Always test before using special cleaning products.