



7 62X 27 - 7 62X 40



7 62X 35 - 7 62X 42



7 62X 25


## 1. USE

Socket outlets with or without shutters.  
 Mechanisms supplied with protection cover.  
 To be equipped with plates one or several gangs.  
 Flush-mounting or surface-mounting.  
 Screw or claw fixing.

## 2. RANGE

Description	White	Aluminium	Anthracite	Smoked grey	Pearl	Red
2 P+E socket shutters automatic terminal	-	7 621 25	7 622 25	7 623 25	7 624 25	-
2 P+E socket shutters screw terminal	-	7 621 27	7 622 27	7 623 27	7 624 27	7 620 26
2 x 2 P+E socket screw terminal	7 620 35	7 621 35	7 622 35	7 623 35	7 624 35	-
2 P+E socket screw terminal	-	7 621 40	7 622 40	7 623 40	7 624 40	-
2 x 2 P+E socket shutters screw terminal	7 620 42	7 621 42	7 622 42	7 623 42	7 624 42	-
2 P+E socket shutters tamperproof screw terminal	-	-	-	-	-	7 620 47

### 3. DIMENSIONS (mm)

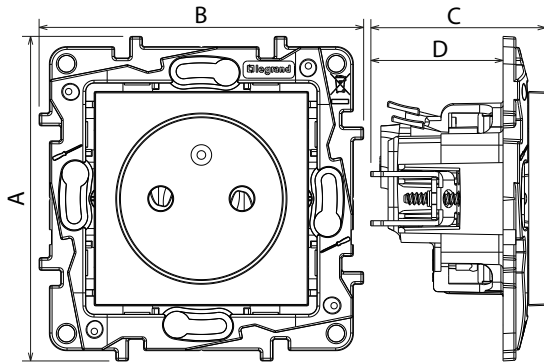

References	A	B	C	D
7 62X 25/26/27/40	75.8	75.8	40.8	30.8
7 620 47			41	
7 62X 35/42	86.2		57	

### 4. CONNECTION

References	Type of terminals	Stripping length (mm)
7 62X 26/27/35/40/42/47	Screw	9
7 62X 25	Automatic	12

Capacity: 2 x 2.5 mm<sup>2</sup>  
Flexible or rigid cables compatible

### 5. TECHNICAL CHARACTERISTICS

#### ■ 5.1 Mechanical characteristics

Protection against solid bodies and liquids: IP 20  
Protection against impact: IK 04

#### ■ 5.2 Material characteristics

Material : - Mechanism housing: PC

- Halogen free

- UV resistant

- Claws: steel

Material of the support: - PC

- Halogen free

Self-extinguishing:

+ 850° C / 30 s for insulating parts holding live parts in place

+ 650° C / 30 s for other parts made of insulating materials

#### ■ 5.3 Electrical characteristics

Voltage: 250 V~

Current: 16 A

Frequency: 50/60 Hz

#### ■ 5.4 Climatic characteristics

Storage and use temperature: - 5° C to + 35° C

### 6. MAINTENANCE

Surface cleaning with a cloth.

Do not use: acetone, tar remover, trichloroethylene.

Maintenance with the following products: Hexane (EN 60669-1), Methylated spirit, Soapy water, Diluted ammonia, Bleach diluted to 10%, Window-cleaning products.

**Caution:** A preliminary test should be carried out if other specific cleaning products are to be used.

### 7. STANDARDS AND APPROVALS

Compliance with standards of installation and manufacturing.  
Refer to e. catalogue.