



Vertical multi-outlet adapter with SPD

Cat. No(s): 0 494 10 - 6 945 05

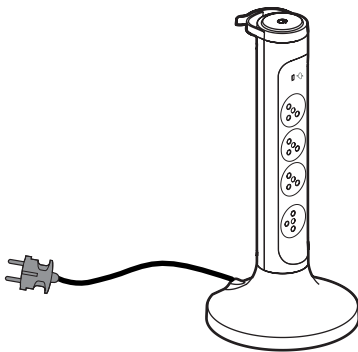

0 494 10

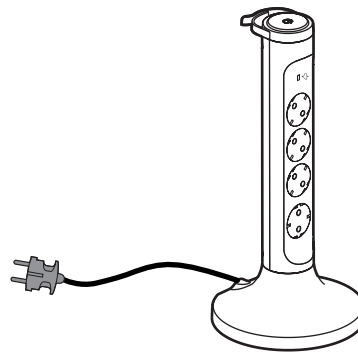

6 945 05

1. USE

2P+E flush multi-outlet extension, with safety shutter, with SPD, switch and power supply cord.


For installation on the floor, on a desk or on a work surface with double-sided tape or with screws (not supplied).

Fixable and rotating device.


2. RANGE

2P+E flush socket blocks with recesses at a 45° angle (except for 1 at 90° at the bottom of the tower). Wired and equipped with a 2 m cord fitted with a 2P+E plug (H05VVF, 3G 1.5 mm ²)	White/Black
4 x 2P+E + SPD + 1.5 mm ² cable with ON/OFF switch and accessory for organising the cables at the top of the tower. French/Belgian standard	0 494 10
4 x 2P+E + SPD + 1.5 mm ² cable with ON/OFF switch and accessory for organising the cables at the top of the tower. German standard	6 945 05

3. DIMENSIONS (mm)

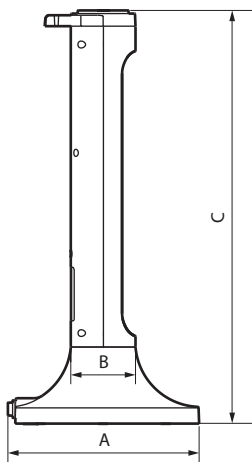

A	B	C
172	58	370



A	B
110	70

4. TECHNICAL CHARACTERISTICS

■ 4.1 Mechanical characteristics

Impact tests: IK 04

Protection against solid/bodies and liquids: IP 20

■ 4.2 Material characteristics

Plastic + thermoplastiqc: Matt White RAL 9003/Matt Black RAL 9017

Halogen-free

UV-resistant

Self-extinguishing:

750°C/30 s for insulating components holding live parts in place.

650°C/30 s for other insulating components.

■ 4.3 Electrical characteristics

Voltage: 230 V~

Frequency: 50 Hz

Current: 16 A

Power: 3680 W max.

SPD:

Type of SPD	Uc	Uoc	Up	IscCR
Type 3 residual current mode	275 V	4 kV	1 kV	1.5 kA

• **The switch is set to ON and the green LED is lit:** the SPD is active and protecting any plugged-in appliances.

• **The switch is set to ON and the green LED is off:** the SPD has protected against lightning but is no longer protecting the plugged-in appliances.

Note: The multi-outlet adapter still works but is not protected.

■ 4.4 Climate characteristics

Usage temperature: -5°C to +35°C

Storage temperature: -20°C to +70°C

5. CARE

Surface cleaning with a cloth.

Do not use: acetone, tar remover, trichloroethylene.

Caution: Always test before using other special cleaning products.

6. STANDARDS AND APPROVALS

Compliant with installation and manufacturing standards

See e. catalogue.