


LED FLOOD BUTTERFLY WHITE BLACK

& LED FLOOD BUTTERFLY Radar Sensor BLACK



10W
100x90x9 mm
(LxWxH)

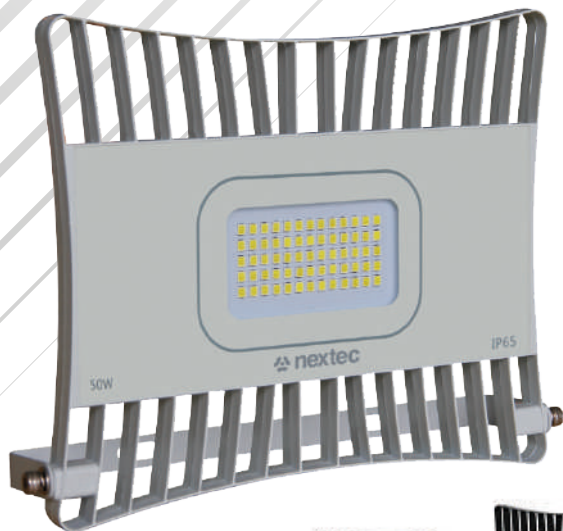

20W
120x125x9 mm
(LxWxH)



30W
151x148x12 mm
(LxWxH)



50W
200x180x12 mm
(LxWxH)



100W
238x260x12 mm
(LxWxH)



150W
278x252x14 mm
(LxWxH)



200W
295x330x16 mm
(LxWxH)

BLACK PF041817

PF041824

PF041831

PF041848

PF041855

PF041862

PF041879 BLACK

WHITE PF041889

PF041893

PF041909

PF041916

PF041923

PF041930


PF041947 WHITE

	LED FLOOD BUTTERFLY	LED FLOOD BUTTERFLY Radar Sensor
	biała/czarna / white/black	czarna / black
Moc / Power	10 / 20 / 30 / 50 / 100 / 150 / 200 W	50 / 100 W
VAC - Hz	176-264VAC - 50Hz/60Hz	176-264VAC - 50Hz/60Hz
Temperatura barwowa / Color temperature	4200K	4200K
Wskaźnik oddawania barw / Color rendering index (CRI)	Ra >80	Ra >80
Kąt świecenia / Beam angle	120 °	120 °
Stopień ochrony IP / Ingress protection	IP65	IP65
Strumień świetlny / Luminous flux	1000 / 2000 / 3000 / 5000 / 10000 / 15000 / 20000 lm	5000 lm / 10000 lm
Skuteczność świetlna / Luminous efficiency	100 lm/W	100 lm/W
Współczynnik mocy PF / Power factor	<0,9	<0,9
Temp. pracy / working temp.	-20 ~ +50 °C	-20 ~ +50 °C
Żywotność / Life time	30,000 godz./h / LLMF>70% / On/Off: 15000x	30,000 godz./h / LLMF>70% / On/Off: 15000x

Czujnik mikrofalowy 360°
360° Microwave Radar Sensor

Odległość wykrywania 12-15 m
12-15 m sensing distance

Gaśnie po odejściu osoby na 5 sekund
Goes off after the person leaves for 5 seconds

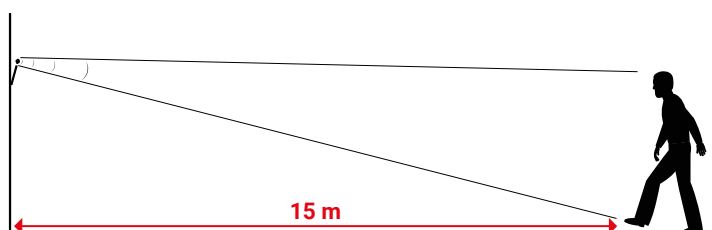

LED FLOOD BUTTERFLY Radar Sensor



50W
200x180x12 mm
(LxWxH)
PF041954



100W
238x260x12 mm
(LxWxH)
PF041961

BLACK