


## Synthetic protective conduit liquid-tight

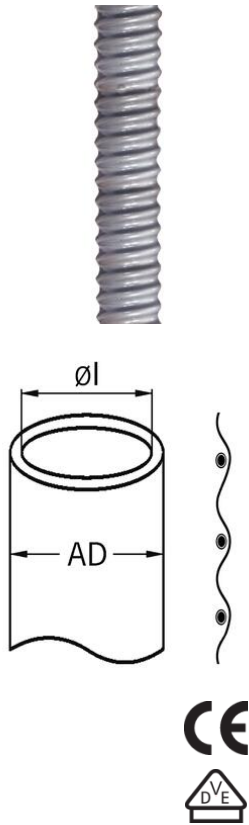

### Synthetic protective conduit liquid-tight

- Synthetic protective conduit liquid-tight
- AIRflex®-KUW-PVC-AS
- Grey

<b>Order number:</b>	<b>2030.101.038</b>
E-No:	125280729
EAN:	7611614015798
Material	Soft PVC jacket, helix of PVC sheathed spring steel wire
Properties	Extremely flexible, highly expansible and upsettable, airtight and liquid-proof, widely resistant to oil and acids, free of silicone and cadmium, inside protection against corrosion due to PVC-sheathed spring steel wire
Application	Machine and plant constructions, vehicle construction, shipbuilding, automation, electrical installations
Tested acc. to	EN / IEC 61386-23
Protection class	IP 68
Operation temperature	-25°C / +90°C / ^ +100°C
Outer diameter	45 mm
Inner diameter	38 mm
Bending radius static	36 mm
Bending radius dynamic	90 mm
Bushing	5020.030.036
Dispatch	25