


## Protective metal conduit non liquid-tight

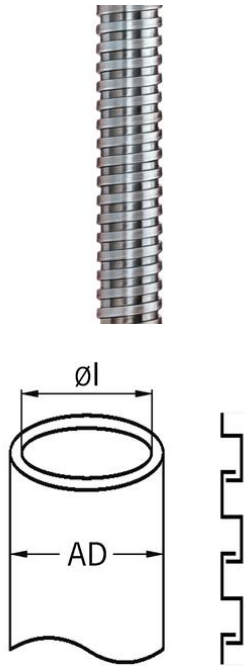

### Protective metal conduit non liquid-tight

- Protective metal conduit non liquid-tight
- SPR-VA

<b>Order number:</b>	<b>1010.801.008</b>
E-No:	125486099
EAN:	7611614202198
Material	Stainless steel A2
Properties	Highly flexible, stretch resistant, lateral crush resistant, high temperature stability
Application	Machine and plant constructions, vehicle construction, shipbuilding, automation, electrical installations, sensor technology
Protection class	IP 40
Operation temperature	-200°C / +600°C
Outer diameter	10 mm
Inner diameter	8 mm
Bending radius static	20 mm
Bending radius dynamic	50 mm
Bushing	5031.027.007
Dispatch	50