


## Synthetic protective conduit liquid-tight

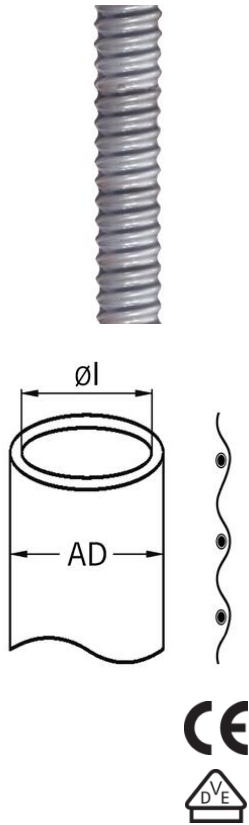

### Synthetic protective conduit liquid-tight

- Synthetic protective conduit liquid-tight
- AIRflex®-KUW-PVC-AS
- Grey

|                        |   |
|------------------------|---|
| <b>Order number:</b>   | <b>2030.101.029</b>   |
| E-No:                  | 125280629   |
| EAN:                   | 7611614015781   |
| Material               | Soft PVC jacket, helix of PVC sheathed spring steel wire  |
| Properties             | Extremely flexible, highly expandable and upsettable, airtight and liquid-proof, widely resistant to oil and acids, free of silicone and cadmium, inside protection against corrosion due to PVC-sheathed spring steel wire |
| Application            | Machine and plant constructions, vehicle construction, shipbuilding, automation, electrical installations   |
| Tested acc. to         | EN / IEC 61386-23   |
| Protection class       | IP 68   |
| Operation temperature  | -25°C / +90°C / ^ +100°C  |
| Outer diameter         | 36 mm   |
| Inner diameter         | 29 mm   |
| Bending radius static  | 25 mm   |
| Bending radius dynamic | 65 mm   |
| Bushing                | 5020.030.029  |
| Dispatch               | 25  |