


## Protective metal conduit liquid-tight

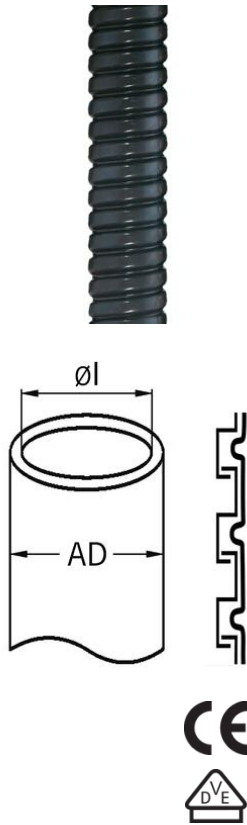

### Protective metal conduit liquid-tight

- Protective metal conduit liquid-tight
- SPR-PVC-AS
- Black

<b>Order number:</b>	<b>2010.112.038</b>
E-No:	125481700
EAN:	7611614158617
Material	zinc coated steel
Sheathing	PVC
Properties	Weatherproof, watertight, widely resistant to seawater, acids and oils, free of silicone and cadmium, very flexible, stretch and crush resistant
Application	Machine and plant constructions, vehicle construction, shipbuilding, automation, electrical installations
Tested acc. to	EN / IEC 61386-23
Protection class	IP 68
Operation temperature	-25°C / +90°C / ^ +100°C
Outer diameter	45 mm
Inner diameter	38 mm
Bending radius static	120 mm
Bending radius dynamic	300 mm
Bushing	5031.028.036
Dispatch	25