


Metal protection conduit for Ex Applications

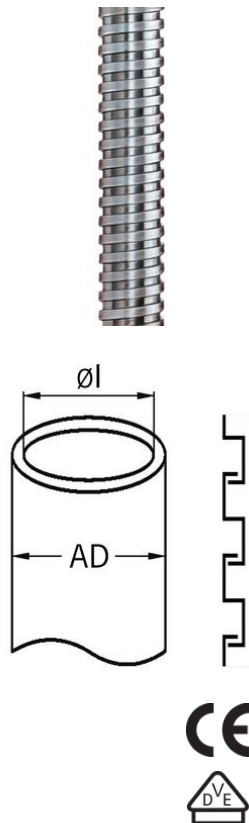

Protective metal conduit non liquid-tight

- Protective metal conduit non liquid-tight
- SPR-AS

Order number:	1010.111.051
E-No:	125450899
EAN:	7611614154640
Material	zinc coated steel
Properties	Highly flexible, stretch resistant, lateral crush resistant
Application	Machine and plant constructions, vehicle construction, shipbuilding, automation, electrical installations
Tested acc. to	EN / IEC 61386-23
Protection class	IP 40
Operation temperature	-50°C / +250°C
Outer diameter	56 mm
Inner diameter	51 mm
Bending radius static	100 mm
Bending radius dynamic	250 mm
Bushing	5031.027.048
Dispatch	25