


## Synthetic protective conduit liquid-tight

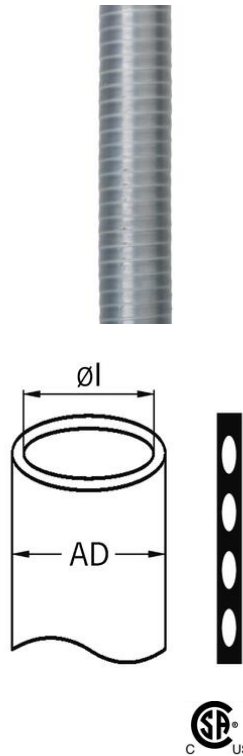

### Synthetic protective conduit liquid-tight

- Synthetic protective conduit liquid-tight
- AIRflex®-GRS
- Grey

<b>Order number:</b>	<b>0220.101.029</b>
EAN:	7611614124803
Material	PVC with helix of rigid plastic
Properties	Flexible, air and liquid tight, widely resistant to acids and oil, free from silicone and cadmium, smooth inside and outside, easy pulling in of cables, easy cleansing of the conduit
Application	Machine and plant constructions, vehicle construction, shipbuilding, automation, electrical installations
Protection class	IP 68
Operation temperature	-25°C / +90°C / ^ +100°C
Outer diameter	36 mm
Inner diameter	29 mm
Bending radius static	130 mm
Bending radius dynamic	325 mm
Bushing	5020.030.029
Dispatch	25