


## Synthetic protective conduit liquid-tight

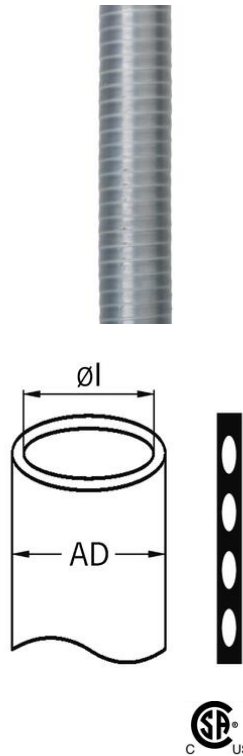

### Synthetic protective conduit liquid-tight

- Synthetic protective conduit liquid-tight
- AIRflex®-GRS
- Grey

<b>Order number:</b>	<b>0220.101.048</b>
EAN:	7611614167275
Material	PVC with helix of rigid plastic
Properties	Flexible, air and liquid tight, widely resistant to acids and oil, free from silicone and cadmium, smooth inside and outside, easy pulling in of cables, easy cleansing of the conduit
Application	Machine and plant constructions, vehicle construction, shipbuilding, automation, electrical installations
Protection class	IP 68
Operation temperature	-25°C / +90°C / ^ +100°C
Outer diameter	56 mm
Inner diameter	48 mm
Bending radius static	250 mm
Bending radius dynamic	625 mm
Bushing	5020.030.048
Dispatch	25