


PCE data sheet

| | |
|------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| article# | 2132-4tt |
| article description | CEE-connector 16A 3p 4h IP67 SHARK TT |
| description long | CEE-connector 16A 3p 4h IP67 SHARK TT housing material: PA6 rated current: 16A number of poles: 3 (2P+PE) clock-position: 4h rated voltage/frequency: 100-130V~ / 50+60Hz contacts: brass connection technology: screwless terminals (TT) IP protection class: IP66/IP67 |
| GTIN (EAN) | 9003399296659 |
| country of origin | AT |
| customs number | 85366990 |
| net weight | 0.157 kg |
| packaging quantity | 10 |
| minimum order quantity | 10 |

| | |
|---------------------------|-------------------------|
| ETIM 7.0 | EC001320 |
| IEC-amperage | 16 A |
| Number of poles | 3 |
| Voltage acc. EN 60309-2 | 110 V (50+60 Hz) yellow |
| Clock hour position | 4 h |
| Identification colour | Yellow |
| Degree of protection (IP) | IP67 |
| Connection system | Screw less terminal |
| Angle of plug | Straight |
| Cable entry | Swivel |
| Material | Plastic |
| Contact material | CuZn |
| Surface finish contacts | Untreated |

| | |
|--------------------|-----------------------|
| a | 132 mm |
| b | 78 mm |
| K (cable Ø) | 6-15 mm |
| SW | 42 mm |
| wire flexible | 1-2,5 mm ² |
| strain relief | 500 Ncm |
| dismantling length | 50 mm |
| stripping length | 10-12 mm |

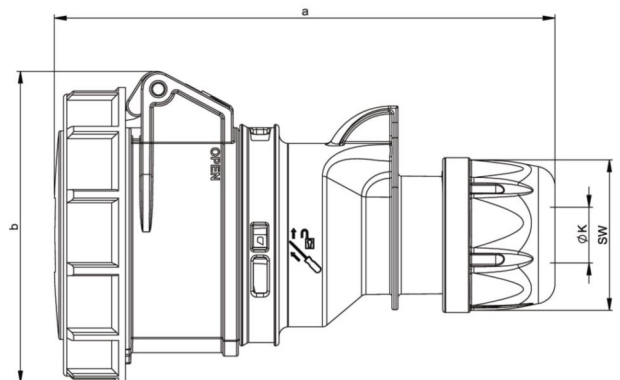

www.manufacturer-safety.info