


PCE data sheet

| | |
|------------------------|---|
| article# | 243-10 |
| article description | CEE-connector 125A 3p 10h IP67 POWER TWIST |
| description long | CEE-connector 125A 3p 10h IP67 POWER TWIST housing material: PA6 rated current: 125A number of poles: 3 (2P+PE) clock-position: 10h rated voltage/frequency: >50V~ / 100-300Hz contacts: brass, with lamellar spring (CuBe) connection technology: frame terminals with screws IP protection class: IP66/IP67 |
| GTIN (EAN) | 9003399888267 |
| country of origin | AT |
| customs number | 85366990 |
| net weight | 1.060 kg |
| packaging quantity | 2 |
| minimum order quantity | 2 |



| | |
|---------------------------------|-----------------------------|
| ETIM 8.0 | EC001320 |
| IEC-amperage | 125 A |
| Number of poles | 3 |
| Voltage according to EN 60309-2 | 50-500 V (100-300 Hz) green |
| Clock hour position | 10 h |
| Identification colour | Green |
| RAL-number | 7046 |
| Degree of protection (IP) | IP67 |
| Connection system | Screwed terminal |
| Angle of plug | Straight |
| Cable entry | Gland nut |
| Material | Plastic |
| Contact material | CuZn |
| Surface treatment contacts | Untreated |

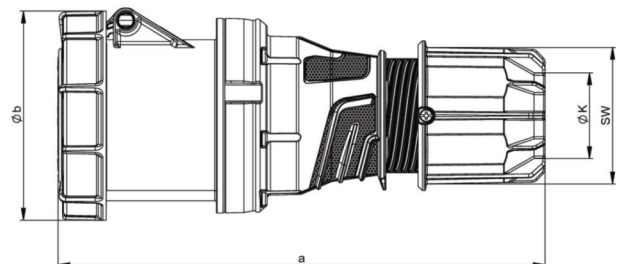

| | |
|--------------------|-----------------------|
| a | 287 mm |
| b | 124 mm |
| K (cable Ø) | 22,5-50 mm |
| SW | 81 mm |
| wire flexible | 16-50 mm ² |
| contact screws | 450 Ncm |
| strain relief | 1500 Ncm |
| dismantling length | 100 mm |
| stripping length | 24-27 mm |



<https://www.pcelectric.at/shop/en/?func=detail&artnr=243-10>



www.manufacturer-safety.info