


## PCE data sheet

|                        |                                                                                                                                                                                                                                                                                                                   |
|------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| article#               | <b>80152-6tt</b>                                                                                                                                                                                                                                                                                                  |
| article description    | <b>CEE angled plug 16A 5p 6h IP67 TT TWIST</b>                                                                                                                                                                                                                                                                    |
| description long       | CEE angled plug 16A 5p 6h IP67 TT TWIST<br>housing material: PC/ABS<br>rated current: 16A<br>number of poles: 5 (3P+N+PE)<br>clock-position: 6h<br>rated voltage/frequency: 200/346V~ - 240/415V~<br>/ 50+60Hz<br>contacts: brass<br>connection technology: screwless terminals (TT)<br>IP protection class: IP67 |
| GTIN (EAN)             | 9003399805028                                                                                                                                                                                                                                                                                                     |
| country of origin      | AT                                                                                                                                                                                                                                                                                                                |
| customs number         | 85366990                                                                                                                                                                                                                                                                                                          |
| net weight             | 0.191 kg                                                                                                                                                                                                                                                                                                          |
| minimum order quantity | 10                                                                                                                                                                                                                                                                                                                |

|                            |                      |
|----------------------------|----------------------|
| ETIM 8.0                   | EC000140             |
| IEC-ampereage              | 16 A                 |
| Number of poles            | 5                    |
| Voltage acc. EN 60309-2    | 400 V (50+60 Hz) red |
| Clock hour position        | 6 h                  |
| Identification colour      | Red                  |
| Degree of protection (IP)  | IP67                 |
| Connection system          | Screw less terminal  |
| Cable entry                | Swivel               |
| Angle of plug              | Angled               |
| Material                   | Plastic              |
| Contact material           | CuZn                 |
| Surface treatment contacts | Untreated            |

|                    |           |
|--------------------|-----------|
| a                  | 109 mm    |
| b                  | 87 mm     |
| c                  | 107 mm    |
| d                  | 20 °      |
| K (cable Ø)        | 8-16 mm   |
| SW                 | 42 mm     |
| wire flexible      | 1-2,5 mm² |
| strain relief      | 500 Ncm   |
| dismantling length | 50 mm     |
| stripping length   | 10-12 mm  |

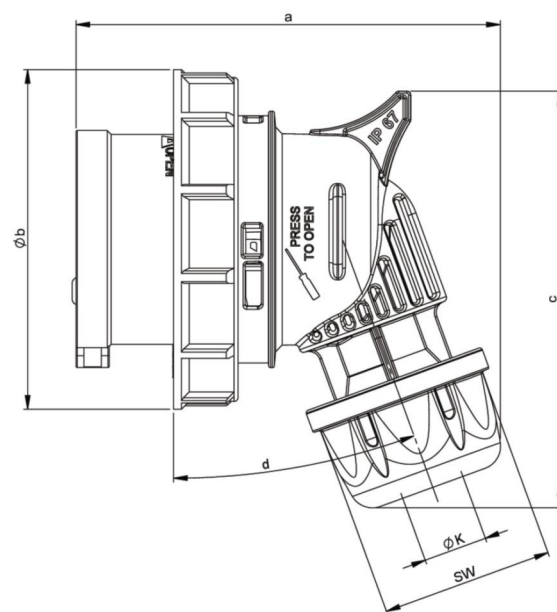

<https://www.pcelectric.at/shop/en/?func=detail&artnr=80152-6tt>



[www.manufacturer-safety.info](http://www.manufacturer-safety.info)