


PCE data sheet

article#	545-7
article description	CEE-wall mounted plug 125A 5p 7h IP67 POWER TWIST
description long	CEE-wall mounted plug 125A 5p 7h IP67 POWER TWIST housing material: PC/ABS rated current: 125A number of poles: 5 (3P+N+PE) clock-position: 7h rated voltage/frequency: 277/480V~ - 288/500V~ / 50+60Hz contacts: brass nickel plated, with pilot pin connection technology: frame terminals with screws IP protection class: IP66/IP67
GTIN (EAN)	9003399220005
country of origin	AT
customs number	85366990
net weight	1.834 kg
packaging quantity	1
minimum order quantity	1

ETIM 7.0	EC001319
IEC-amperage	125 A
Voltage acc. EN 60309-2	500 V (50+60 Hz) black
Number of poles	5
Clock hour position	7 h
Identification colour	Black
Degree of protection (IP)	IP67
Connection system	Screwed terminal
Construction type	Surface mounted plug
Angle of plug	Angled
Material	Plastic
Contact material	CuZn
Surface finish contacts	Nickel-plated

wire flexible	16-50 mm²
wire solid	16-70 mm²
contact screws	450 Ncm
dismantling length	100 mm
stripping length	24-27 mm

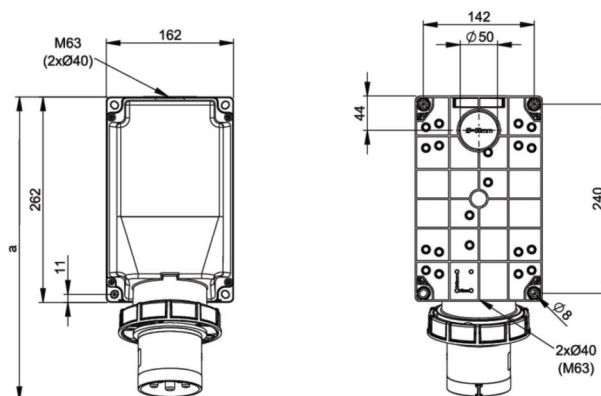

b = Höhe / height
Neigung / angle = 15°



www.manufacturer-safety.info