


# PCE data sheet

|                     |                                                                                                                                                                                                                                                                                                                                                           |
|---------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| article#            | <b>114-10k</b>                                                                                                                                                                                                                                                                                                                                            |
| article description | <b>CEE wall mounted socket (compact) 16A 4p 10h IP44</b>                                                                                                                                                                                                                                                                                                  |
| description long    | CEE wall mounted socket (compact) 16A 4p 10h IP44<br>housing material: PA6<br>rated current: 16A<br>number of poles: 4 (3P+PE)<br>clock-position: 10h<br>rated voltage/frequency: >50V~ / 100-300Hz<br>contacts: brass<br>connection technology: screw terminals<br>cable entry: top and rear<br>inc. threaded cable grommet<br>IP protection class: IP44 |
| GTIN (EAN)          | 9003399017933                                                                                                                                                                                                                                                                                                                                             |
| country of origin   | AT                                                                                                                                                                                                                                                                                                                                                        |
| customs number      | 85366990                                                                                                                                                                                                                                                                                                                                                  |
| net weight          | 0.214 kg                                                                                                                                                                                                                                                                                                                                                  |
| packaging quantity  | 10                                                                                                                                                                                                                                                                                                                                                        |

|                           |                             |
|---------------------------|-----------------------------|
| ETIM 7.0                  | EC001321                    |
| Model                     | Surface mounted (plaster)   |
| IEC-amperage              | 16 A                        |
| Number of poles           | 4                           |
| Voltage acc. EN 60309-2   | 50-500 V (100-300 Hz) green |
| Clock hour position       | 10 h                        |
| Identification colour     | Green                       |
| RAL-number                |                             |
| Degree of protection (IP) | IP44                        |
| Connection system         | Screwed terminal            |
| Cable entry               | Swivel                      |
| Material                  | Plastic                     |
| Contact material          | CuZn                        |
| Surface finish contacts   | Untreated                   |
| Type of fastening         | Inner lying mounting        |

|                    |                       |
|--------------------|-----------------------|
| wire flexible      | 1-2,5 mm <sup>2</sup> |
| wire solid         | 1-4 mm <sup>2</sup>   |
| contact screws     | 100 Ncm               |
| dismantling length | 50 mm                 |
| stripping length   | 10-12 mm              |

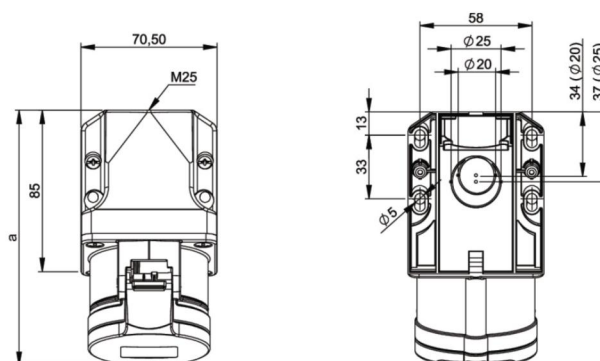

[www.manufacturer-safety.info](http://www.manufacturer-safety.info)