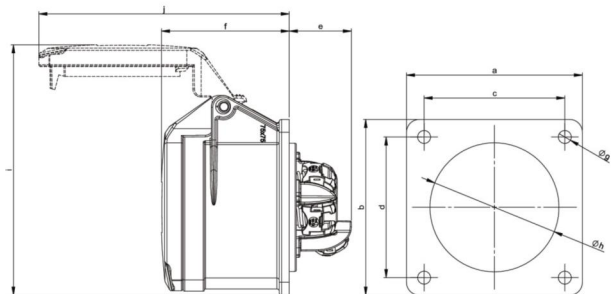


PCE data sheet

| | |
|---------------------|---|
| article# | 324-4ttf7 |
| article description | CEE-flanged socket straight (75x75mm) 32A 4p 4h IP44 TT |
| description long | CEE-flanged socket straight (75x75mm) 32A 4p 4h IP44 TT housing material: PA6 rated current: 32A number of poles: 4 (3P+PE) clock-position: 4h rated voltage/frequency: 100-130V~ / 50+60Hz contacts: brass connection technology: screwless terminals (TT) dimensions (flange/fixing center): 75x75 mm / 60x60 mm IP protection class: IP44 |
| GTIN (EAN) | 9003399925412 |
| country of origin | AT |
| customs number | 85366990 |
| net weight | 0.182 kg |
| packaging quantity | 10 |

| | |
|--------------------------------|-------------------------|
| ETIM 7.0 | EC001317 |
| IEC-amperage | 32 A |
| Voltage acc. EN 60309-2 | 110 V (50+60 Hz) yellow |
| Number of poles | 4 |
| Clock hour position | 4 |
| Identification colour | Yellow |
| Degree of protection (IP) | IP44 |
| Connection system | Screw less terminal |
| Angle of plug | Straight |
| Material | Plastic |
| Contact material | CuZn |
| Surface finish contacts | Untreated |
| Flange size vertical | 75 mm |
| Drill hole distance vertical | 60 mm |
| Flange size horizontal | 75 mm |
| Drill hole distance horizontal | 60 mm |

| | |
|--------------------|------------------------|
| wire flexible | 2,5-6 mm ² |
| wire solid | 2,5-10 mm ² |
| dismantling length | 50 mm |
| stripping length | 12-14 mm |


www.manufacturer-safety.info