
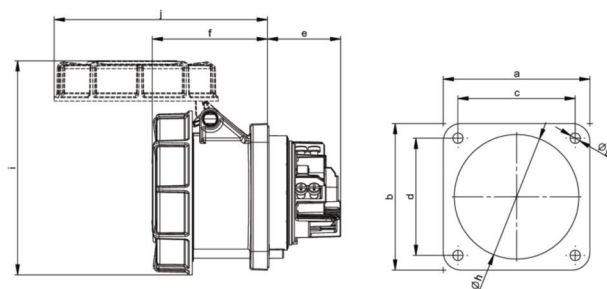


PCE data sheet

| | |
|---------------------|---|
| article# | 333-4 |
| article description | CEE-flanged socket straight (100x100) 63A 3p 4h IP67 POWER TWIST |
| description long | CEE-flanged socket straight (100x100) 63A 3p 4h IP67 POWER TWIST housing material: PA6 rated current: 63A number of poles: 3 (2P+PE) clock-position: 4h rated voltage/frequency: 100-130V~ / 50+60Hz contacts: brass, with lamellar spring (CuBe) connection technology: frame terminals with screws dimensions (flange/fixing center): 100x100 mm / 80x80 mm IP protection class: IP66/IP67 |
| GTIN (EAN) | 9003399062407 |
| country of origin | AT |
| customs number | 85366990 |
| net weight | 0.488 kg |
| packaging quantity | 2 |

| | |
|--------------------------------|-------------------------|
| ETIM 7.0 | EC001317 |
| IEC-amperage | 63 A |
| Voltage acc. EN 60309-2 | 110 V (50+60 Hz) yellow |
| Number of poles | 3 |
| Clock hour position | 4 h |
| Identification colour | Yellow |
| Degree of protection (IP) | IP67 |
| Connection system | Screwed terminal |
| Angle of plug | Straight |
| Material | Plastic |
| Contact material | CuZn |
| Surface finish contacts | Untreated |
| Flange size vertical | 100 mm |
| Drill hole distance vertical | 80 mm |
| Flange size horizontal | 100 mm |
| Drill hole distance horizontal | 80 mm |

| | |
|--------------------|----------------------|
| wire flexible | 6-16 mm ² |
| wire solid | 6-25 mm ² |
| contact screws | 200 Ncm |
| dismantling length | 100 mm |
| stripping length | 15-18 mm |

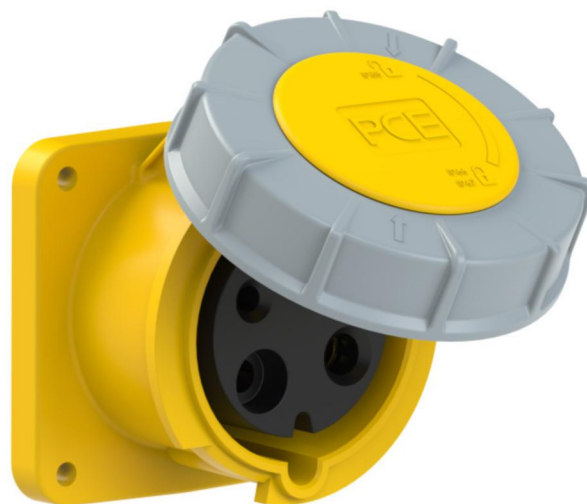

www.manufacturer-safety.info