


## PCE data sheet

article#	<b>345-9</b>
article description	<b>CEE-flanged socket straight (120x120) 125A 5p 9h IP67 POWER TWIST</b>
description long	CEE-flanged socket straight (120x120) 125A 5p 9h IP67 POWER TWIST housing material: PA6 rated current: 125A number of poles: 5 (3P+N+PE) clock-position: 9h rated voltage/frequency: 120/208V~ - 144/250V~ / 50+60Hz contacts: brass, with lamellar spring (CuBe) connection technology: frame terminals with screws dimensions (flange/fixing center): 120x120 mm / 100x100 mm IP protection class: IP66/IP67
GTIN (EAN)	9003399218620
country of origin	AT
customs number	85366990
net weight	0.986 kg
packaging quantity	2



ETIM 7.0	EC001317
IEC-amperage	125 A
Voltage acc. EN 60309-2	200-250 V (50+60 Hz) blue
Number of poles	5
Clock hour position	9 h
Identification colour	Blue
Degree of protection (IP)	IP67
Connection system	Screwed terminal
Angle of plug	Straight
Material	Plastic
Contact material	CuZn
Surface finish contacts	Untreated
Flange size vertical	120 mm
Drill hole distance vertical	100 mm
Flange size horizontal	120 mm
Drill hole distance horizontal	100 mm

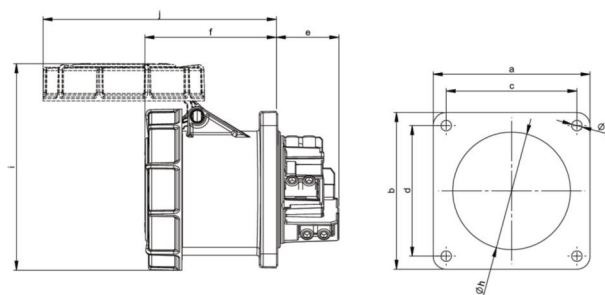

wire flexible	16-50 mm <sup>2</sup>
wire solid	16-70 mm <sup>2</sup>
contact screws	450 Ncm
dismantling length	100 mm
stripping length	24-27 mm



[www.manufacturer-safety.info](http://www.manufacturer-safety.info)