



PCE data sheet

article#	5571502400
article description	CEE-motor protection plug contactor 4kW PI+BA+RFC 16A 5p 6h (2.4-4.0A) IP44
description long	CEE-motor protection plug contactor 5,5kW PI+BA+RFC 16A 5p 6h (2.4-4.0A) IP44 housing material: PC/ABS rated current: 16A number of poles: 5 (3P+N+PE) clock-position: 6h rated voltage/frequency: 200/346V~ - 240/415V~ / 50+60Hz contacts: brass nickel plated connection technology: screw terminals rocker switch ON/OFF (HAND/AUTO), motor setting range: 2,4A - 4A, contactor: 4kW with phase inverter, operating display and rotation field check cable gland M16 (for float switch) and M25 IP protection class: IP44
GTIN (EAN)	9003399653964
country of origin	AT
customs number	85366990
net weight	1.000 kg
packaging quantity	1

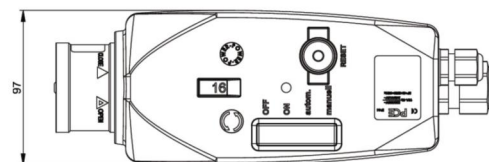

ETIM 7.0	EC000452
Type of motor protection	Thermal release
Type of control element	Push button switch
Phase inverter	True
Phase sequence monitoring	True
Adjustable current range	2,4 - 4,0 A
Colour plug	Red
Colour housing	Grey
Rated voltage	400 V
Rated permanent current lu	16 A

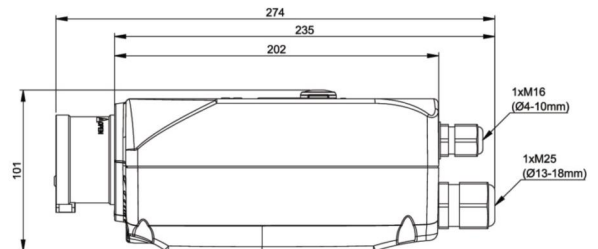

www.manufacturer-safety.info