


|                        |                                                                                                                                                                                                                                                                                                                                                                                                      |
|------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| article#               | 393-4f9v                                                                                                                                                                                                                                                                                                                                                                                             |
| article description    | <b>CEE-flanged socket straight 54x60mm 32A 3p 24/42VAC 100-200Hz IP44/IP54 TWIST</b>                                                                                                                                                                                                                                                                                                                 |
| description long       | CEE-flanged socket straight 54x60mm 32A 3p 24/42VAC 100-200Hz IP44/IP54 TWIST<br>housing material: PA6<br>rated current: 32A<br>number of poles: 3 (3P)<br>clock-position: 4h<br>rated voltage/frequency: 24/42V~ / 100-200Hz<br>contacts: brass nickel plated<br>connection technology: screw terminals<br>dimensions (flange/fixing center): 54x60 mm / 44x44 mm<br>IP protection class: IP44/IP54 |
| GTIN (EAN)             | 9003399308840                                                                                                                                                                                                                                                                                                                                                                                        |
| country of origin      | AT                                                                                                                                                                                                                                                                                                                                                                                                   |
| customs number         | 85366990                                                                                                                                                                                                                                                                                                                                                                                             |
| net weight             | 0.130 kg                                                                                                                                                                                                                                                                                                                                                                                             |
| packaging quantity     | 10                                                                                                                                                                                                                                                                                                                                                                                                   |
| minimum order quantity | 10                                                                                                                                                                                                                                                                                                                                                                                                   |

|                                |                                      |
|--------------------------------|--------------------------------------|
| ETIM 7.0                       | EC001317                             |
| IEC-amperage                   | 32 A                                 |
| Voltage acc. EN 60309-2        | 20-25 V / 40-50 V (100-200 Hz) green |
| Number of poles                | 3                                    |
| Clock hour position            | 4 h                                  |
| Identification colour          | Green                                |
| Degree of protection (IP)      | IP54                                 |
| Connection system              | Schraubklemme                        |
| Angle of plug                  | Straight                             |
| Material                       | Plastic                              |
| Flange size vertical           | 60 mm                                |
| Drill hole distance vertical   | 44 mm                                |
| Flange size horizontal         | 54 mm                                |
| Drill hole distance horizontal | 44 mm                                |

|                    |                        |
|--------------------|------------------------|
| wire flexible      | 1-10 mm <sup>2</sup>   |
| wire solid         | 1,5-10 mm <sup>2</sup> |
| contact screws     | 160 Ncm                |
| dismantling length | 70 mm                  |
| stripping length   | 14-16 mm               |

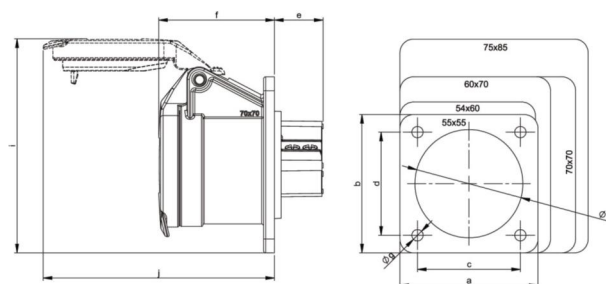

[www.manufacturer-safety.info](http://www.manufacturer-safety.info)