


## PCE data sheet

|                        |   |
|------------------------|---|
| article#               | <b>383-11f4v</b>  |
| article description    | <b>CEE-flanged socket straight 55x55mm 16A 3p<br/>24/42VAC &gt;400-500Hz IP44/IP54 TWIST</b>  |
| description long       | CEE-flanged socket straight 55x55mm 16A 3p<br>24/42VAC >400-500Hz IP44/IP54 TWIST<br>housing material: PA6<br>rated current: 16A<br>number of poles: 3 (3P)<br>clock-position: 11h<br>rated voltage/frequency: 24/42V~ / >400-500Hz<br>contacts: brass nickel plated<br>connection technology: screw terminals<br>dimensions (flange/fixing center): 55x55 mm /<br>41x41 mm<br>IP protection class: IP44/IP54 |
| country of origin      | AT  |
| customs number         | 85366990  |
| packaging quantity     | 10  |
| minimum order quantity | 10  |

|                                |                                       |
|--------------------------------|---------------------------------------|
| ETIM 7.0                       | EC001317                              |
| IEC-amperage                   | 16 A                                  |
| Voltage acc. EN 60309-2        | 20-25 V / 40-50 V (>400-500 Hz) green |
| Number of poles                | 3                                     |
| Clock hour position            | 11 h                                  |
| Identification colour          | Green                                 |
| Degree of protection (IP)      | IP54                                  |
| Connection system              | Schraubklemme                         |
| Angle of plug                  | Straight                              |
| Material                       | Plastic                               |
| Flange size vertical           | 55 mm                                 |
| Drill hole distance vertical   | 41 mm                                 |
| Flange size horizontal         | 55 mm                                 |
| Drill hole distance horizontal | 41 mm                                 |

|                    |                        |
|--------------------|------------------------|
| wire flexible      | 1-10 mm <sup>2</sup>   |
| wire solid         | 1,5-10 mm <sup>2</sup> |
| contact screws     | 160 Ncm                |
| dismantling length | 70 mm                  |
| stripping length   | 14-16 mm               |

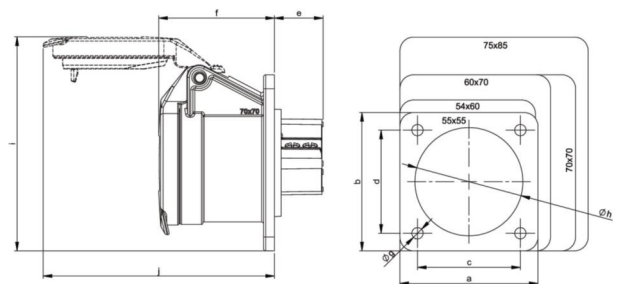

[www.manufacturer-safety.info](http://www.manufacturer-safety.info)