



item number	A	thickness of metal sheet	weight kg/pc
<b>DV 75_S</b>	68	1,5	0,07
<b>DV 75_GMT</b>			
<b>DV 100_S</b>	75	1,5	0,08
<b>DV 100_GMT</b>			
<b>DV 150_S</b>	125	1,5	0,13
<b>DV 150_GMT</b>			
<b>DV 200_S</b>	175	1,5	0,18
<b>DV 200_GMT</b>			
<b>DV 300_S</b>	275	1,5	0,29
<b>DV 300_GMT</b>			
<b>DV 400_S</b>	375	1,5	0,39
<b>DV 400_GMT</b>			
<b>DV 500_S</b>	475	1,5	0,50
<b>DV 500_GMT</b>			
<b>DV 600_S</b>	575	1,5	0,60
<b>DV 600_GMT</b>			

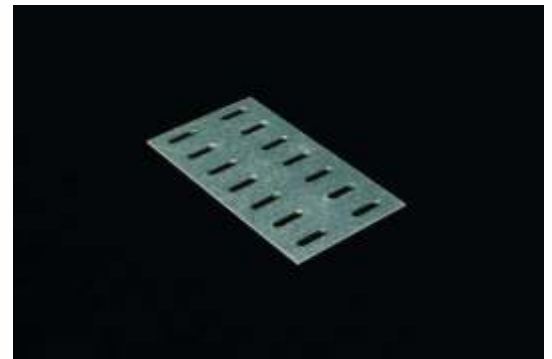

**product description:** Is used for reinforcing the tray connections without integrated coupling.

To fix the connection use the bolt NSM 6X10. To protect the cables, the bolt head is inside the cable tray.

The plate and bolt with a GMT surface finish is used for a tray with an F surface finish.

These items can also be ordered in a varnished version.

**surface finish:** S - Pre-Galvanized, zinc-layer 15 - 27 µm  
 GMT - non electrolytic plating, aluminum-zinc-layer 5-15 µm (equivalent Hot Dip Galvanized)

**sales amount:** á 1 pc

**certification:** EN 61537:02

**storage:** EN 60721-3-1

