
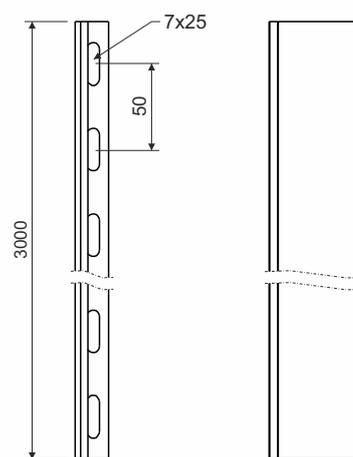


type number	height (H) (mm)	thickness of metal sheet (mm)	w eight (kg/m)
<b>P 35_S</b>	29	0,8	0,34
<b>P 35_F</b>	29	1,0	0,48
<b>P 60_S</b>	54	0,8	0,50
<b>P 60_F</b>	54	1,0	0,72
<b>P 85_S</b>	79	0,8	0,66
<b>P 85_F</b>	79	1,0	0,95
<b>P 110_S</b>	104	0,8	0,81
<b>P 110_F</b>	104	1,0	1,18



**product description:** The partition is used to separate cables in cable trays. In term of electrical compatibility, it is also used for dividing several types of lines. It is recommended to use covers for this type of installation and make the covered and shielded room.

The connection is performed using the bolts NSM 6X10, 2 pcs per 1 meter. To protect the cables, the bolt head is inside the cable tray.

A bolt with a GMT surface finish is used for a tray with an F surface finish.

These items can also be ordered in a varnished version.

**surface finish:** S - Pre-Galvanized, zinc-layer 15 - 27 µm

F - Hot Dip Galvanized according to ČSN EN ISO 1461, zinc-layer 45 µm (min. 35 µm)

**sales amount:** á 3000 mm

**meets the requirements:** EN 61537:02

**storage:** EN 60721-3-1

