


item number	height (mm)	width (mm)	length (mm)	thickness of metal sheet (mm)
KZ 60X50X1.50_PO	60	50,0	3000	1,5
KZ 60X75X1.50_PO	60	75,0	3000	1,5
KZ 60X100X1.50_PO	60	100,0	3000	1,5
KZ 60X150X1.50_PO	60	150,0	3000	1,5
KZ 60X200X1.50_PO	60	200,0	3000	1,5
KZ 60X300X1.50_PO	60	300	3000	1,5
KZ 60X50X1.50_POF	60	50,0	3000	1,5
KZ 60X75X1.50_POF	60	75,0	3000	1,5
KZ 60X100X1.50_POF	60	100,0	3000	1,5
KZ 60X150X1.50_POF	60	150,0	3000	1,5
KZ 60X200X1.50_POF	60	200,0	3000	1,5
KZ 60X300X1.50_POF	60	300,0	3000	1,5

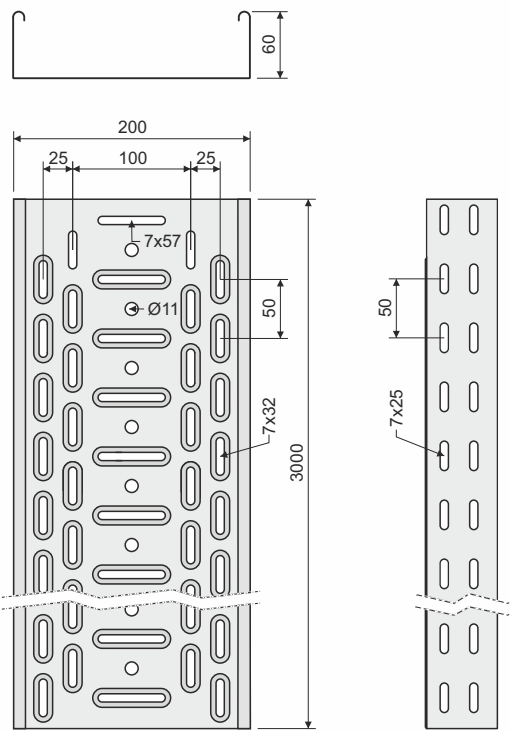

product description: Cable trays are usable for tray with maintained functionality in fire. Cable trays are classified for standard constructions. Use the coupling KSBS fully equipped with NSM 6X10 screws for the connecting.

surface finish: PO - Pre-Galvanized, zinc-layer 15 - 27 µm
POF - Hot Dip Galvanized, average zinc layer 55 µm (min. 45 µm)

sales amount: á 3 m

classification: ČSN 73 0895 P 90-R
DIN 4102-12 E 90
STN 92 0205 PS 90
Fire classification is depend on the specific conditions of the cable tray, detailed in the catalog Systems with maintained functionality in fire

storage: EN 60721- 3-1

