


item number	for width of cable tray A (mm)	height H (mm)	thickness of metal sheet (mm)	weight (kg/m)
V 40_S	40	10	0,55	0,26
V 40_F			0,80	0,46
V 50_S	50	11	0,55	0,31
V 50_F			0,80	0,54
V 62_S	62	11	0,55	0,36
V 62_F			0,80	0,62
V 75_S	75	11	0,55	0,43
V 75_F			0,80	0,72
V 100_S	100	11	0,55	0,53
V 100_F			0,80	0,91
V 125_S	125	11	0,55	0,64
V 125_F			0,80	1,10
V 150_S	150	11	0,55	0,75
V 150_F			0,80	1,30
V 200_S	200	11	0,55	0,98
V 200_F			0,80	1,68
V 250_S	250	11	0,55	1,20
V 250_F			0,80	2,05
V 300_S	300	11	0,80	2,07
V 300_F			1,00	2,73
V 400_S	400	14	1,00	3,43
V 400_F			1,00	3,63
V 500_S	500	14	1,00	4,22
V 500_F			1,00	4,80
V 600_S	600	14	1,20	6,27
V 600_F			1,20	6,70

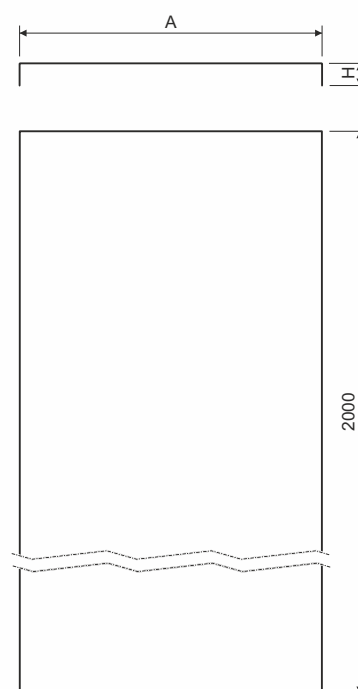

product description: The cable tray cover is used to cover cable trays and cable ladders.
 The standard length of the cable tray cover is 2 m.
 Mentioned thickness of the metal plate is just orientation.
 The fixing of the cover to the tray is done using the cover fixture VU (2 pcs per meter), except for V 40. The V 40 cover may be alternatively fixed using a clamping belt.
 These items can also be ordered in a varnished version.

surface finish: S - Pre-Galvanized according to EN 10346, EN 10143, zinc-layer 15 - 27 µm
 F - Hot Dip Galvanized according to EN ISO 1461, zinc-layer 45 µm (min. 35 µm)

sales amount: à 2000 mm

meets the requirements: EN 61537:02

storage: EN 60721-3-1