


Plexo™ Roller shutter

Cat. No(s): 0 695 38L/39L
 0 696 29L/38L
 0 698 98L

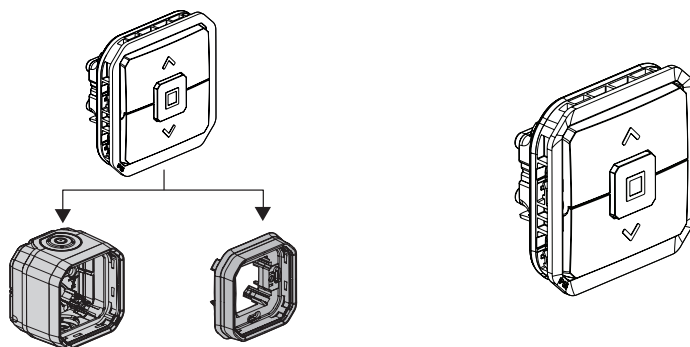


1. USE

Waterproof equipment system intended for residential and professional technical locations (garages, cellars, car parks, workshops and industrial kitchens, etc.) as well as outdoor environments (terraces, gardens, campsites, etc.).
 Roller shutter control mechanisms.

2. RANGE

		References: Designations
Configurable		0 695 38L - 0 696 29L - 0 698 98L : Switch 0 695 39L - 0 696 39L : Push-button

3. OVERALL DIMENSIONS (mm)

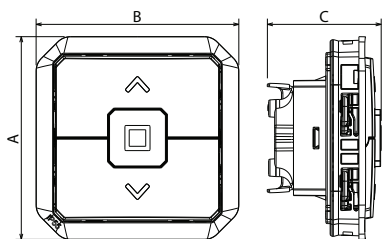

	A	B	C	D
Configurable	70.5	70.5	40	-

4. CONNECTION

Type of terminals: automatic
 Terminal capacity: 1.5 mm² - 2.5 mm² (1 or 2 conductors)
 Stripping length: 12 mm

5. TECHNICAL CHARACTERISTICS

■ 5.1 Protection index

Protection against solid bodies and liquids: IP 55
 Protection against impact: IK 06

■ 5.2 Material characteristics


Rocker: ABS
 Cover plate: PP + SEBS
 Mechanism: PC
 UV-resistant
 Halogen-free
 Resistance to salt spray: 7 days (168 h)

Self-extinguishing:

850°C/30 s for insulating components holding live parts in place.
 650°C/30 s for other insulating components.

■ 5.3 Electrical characteristics

Voltage: 250 V~
 Frequency: 50 Hz
 Current: 0 695 39L - 0 696 38L = 6 A
 0 695 38L - 0 696 29L - 0 698 98L = 6 AX
 Maximum power on lamps with integrated ballast (LED lamps and compact fluorescent): 100 W



■ 5.4 Climate characteristics

Usage temperature: - 10° to + 40° C
 Storage temperature: - 25° C to + 60° C

6. CLEANING

Surface cleaning with a cloth.
 Do not use: acetone, tar remover, trichloroethylene.

Maintenance with the following products: Hexane (EN 60669-1), Methylated spirit, Soapy water, Diluted ammonia, Bleach diluted to 10%, Window-cleaning products, Pre-saturated wipes.

Caution: A preliminary test should be carried out if other specific cleaning products are to be used.

7. STANDARDS AND APPROVALS

Compliance with standards of installation and manufacturing.
 Refer to e. catalogue.