


Plexo™ Light sensitive switch

Cat. No(s): 0 695 17L

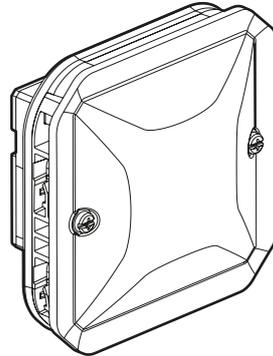

1. USE

Light sensitive switch: light comes on as soon as night falls and goes off at dawn.

Waterproof device for illuminating outdoor spaces (car parks, courtyards, hotel lighting paths, etc) and indoor spaces (shops, warehouses, etc).

Factory-set daylight setpoint can be changed (see guide LE11736).


Mechanism supplied with adaptor support and cover plate.

Mechanism can be flush-mounted and surface-mounted with casing and support.

2. RANGE

Description	Grey
Modular product Monobloc unit with integrated photoelectric cell	0 695 17L

3. DIMENSIONS (mm)

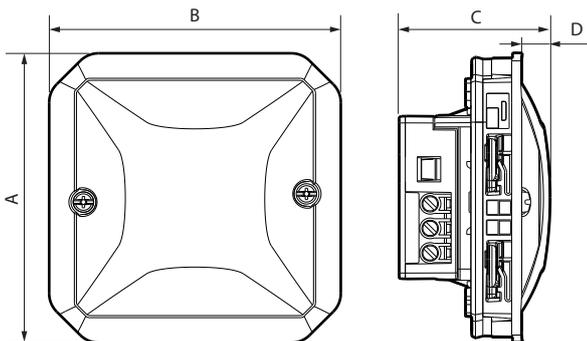

A	B	C	D
70.5	70.5	36.5	6.5

4. CONNECTION

Type of terminals: with screws

Terminal capacity: 2 x 1.5 mm² - 1 x 2.5 mm²

Stripping length: 8 mm

Screwdriver: flat 3.5 mm

5. TECHNICAL CHARACTERISTICS

■ 5.1 Mechanical characteristics

Impact test: IK 08

Protection against solid bodies and/or liquids: IP 55

■ 5.2 Material characteristics

Support: PP + SEBS

Cover: PE HD with white poly gloss appearance

Mechanism casing: PC

Halogen-free

UV-resistant

Resistance to salt spray: 7 days (168 hrs)

Self-extinguishing:

850°C/30 s for insulating components holding live parts in place.

650°C/30 s for other insulating components.

■ 5.3 Electrical characteristics

Voltage: 230 V~

Frequency: 50/60 Hz

Incandescent	LED	Compact fluorescent	LED + CFL	LED + CFL (**)
1400 W	200 VA	500 VA	500 VA	500 VA

Factory-set daylight setpoint ≈ 10 lux

Can be adjusted from 2 to 1500 lux.

■ 5.4 Climate characteristics

Storage temperature: - 25°C to + 70°C

Usage temperature: - 5°C to + 40°C

6. CLEANING

Surface cleaning with a cloth.

Do not use: acetone, tar remover, trichloroethylene.

Resistance to the following agents: Hexane (EN 60669-1), methylated spirits, soapy water, diluted ammonia, pure bleach diluted to 10%, window-cleaning products, pre-impregnated wipes.

Caution: Always test before using other special cleaning products.

The product must not be painted.

7. STANDARDS AND APPROVALS

Compliant with installation and manufacturing standards.

See e. catalogue.