


spring clamp terminal block 1 level fuse-holder, 2.5 mm², grey



MAX. PERMITTED POWER IN CONJ. WITH IEC 60282-2				
Terminal block category	TH35-7.5 (20)	TH35-15 (30)	TH35-15/G32 (30)	TH35-15/G32 (20)
Series M1	4.3	4.3	4.3	4.3
Fuse holder category PVC/TH	1.1	1.1	1.1	1.1
	1.1	1.1	1.1	1.1
Fuse holder category PVC/TH	4	4	4	4
	1.1	1.1	1.1	1.1

Series	HMFA
Code	HF300GR
Type	HMFA.2/GR
HS code	85369010
Colour	grey
TECHNICAL FEATURES	
Function/Type	Fuse-holder "blade" type
Rated cross-section	2.5 mm ²
Connecting capacity	
Flexible wire	0.2-4 mm ²
Rigid wire	0.2-4 mm ²
Wire with ferrule - ferrule type	2.5 mm ² - WP25/14
Electrical characteristics according to IEC EN standard	
Maximum voltage AC/DC	400 V
Maximum current (rated cross-section)	6.3 A
Caliber	A3
Electrical characteristics according to UL Standard	
Maximum voltage AC/DC	600 V
Maximum current (rated cross-section)	
Section (min-max)	
Rated impulse withstand voltage / pollution degree	4 kV / 3
Insulation stripping length	10 mm
Width (pitch)	5.2 mm
Length	66 mm
Height mounted on TH35-7.5/TH35-15/G32	41 / 49 / - mm
Insulation material temperature index (EN 60216-1)	130 °C
Plastic material	Polyamide UL94V-0
ACCESSORIES	
End section	
Grey	HMT.2/1+2/PT/GR (cod. HM511GR)
Blue	-
Thickness	1.5 mm
Cross-connection	
Model A)	PTC/03/... (cod. PTC03...)
Model B)	PTP/03/... (cod. PTP03...)
Rated current carrying capacity IEC/ATEX	24 A
Cross-connection identification strip	-
Coloured partition plate	DFH/2/R (cod. DH02R)
Cross-connection barrier	-
Test plug	SDD/1 (cod. DD001)
Modular test plug	SDH/5 (cod. DH005)
End section for modular test plug	SH5/PT (cod. DH501)
Maximum voltage AC/DC	600 V
Maximum current (rated cross-section)	6.3 A
Section (min-max)	26-12 (AWG)
Marking	
Single marking tag	CNU/8/51 (cod. NU0851S)
Single marking tag for pitch insertion	-
Fuse type	
Conductive element	CO/6 (cod. CO06)
Cartridge	CPF/5 (CPF05)
End bracket	
TH35 screw type	BT/3 (cod. BT003)
TH35 snap-fit type	BTO (cod. BT007)
TH35 and G32 snap-fit type	BTU (cod. BT005)
DIN rail according to IEC 60715/TH35	PR/3/..
APPROVALS AND MARKINGS	

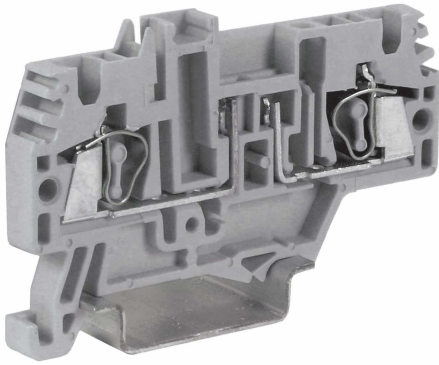

* Suitagle for "blade" fuses (DIN 72581/3F - ISO 8820) or 5x20 mm with CPF05 accessory* The blade fuse can be replaced by 5x20 mm fuses or electronic components, thanks to the accessory CPF05 (for details see the accessories chapter)* Fuse and CPF05 accessory, are available separately

1 For more details on accessories, refer to the relevant chapters

DESCRIZIONE DEL PRODOTTO

spring clamp terminal block 1 level fuse-holder, 2.5 mm², grey