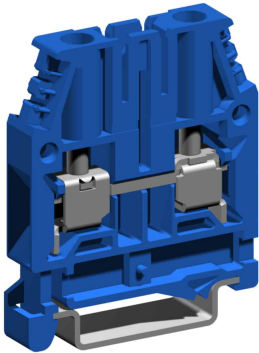




screw terminal block 1 level feed-through, 6 mm<sup>2</sup>, blue



Series	CBC
Code	CBI06
Type	CBC.6 (Ex)i
Colour	blue
<b>TECHNICAL FEATURES</b>	
Function/Type	Feed-through
Rated cross-section	6 mm <sup>2</sup>
Connecting capacity	
Flexible wire	0.2-10 mm <sup>2</sup>
Rigid wire	0.2-10 mm <sup>2</sup>
Wire with ferrule - ferrule type	6 mm <sup>2</sup> - WP60/20
<b>Electrical characteristics according to IEC EN standard</b>	
Maximum voltage AC/DC	1000 V
Maximum current (rated cross-section)	41 A nom./ 64 A max.
Caliber	A5
<b>Electrical characteristics according to UL Standard</b>	
Maximum voltage AC/DC	600 V
Maximum current (rated cross-section)	50 A
Section (min-max)	20-8 (AWG)
Tightening torque value (UL)	15 lb.in
<b>Electrical characteristics according to ATEX directive and IEC Ex standard</b>	
Maximum voltage AC/DC	500 V
Maximum current (rated cross-section)	41 A
Operating temperature Min/Max	-40 °C / +110 °C
Rated impulse withstand voltage / pollution degree	8 kV / 3
Insulation stripping length	10 mm
Tightening torque value (nom. / max.)	0.8 / 1.4 Nm
Width (pitch)	8 mm
Length	44 mm
Height mounted on TH35-7.5/TH35-15/G32	52 / 60 / - mm
Insulation material temperature index (EN 60216-1)	130 °C
Plastic material	Polyamide UL94V-0
<b>ACCESSORIES</b>	
<b>End section</b>	
Grey	CBC.2-10/PT/GR (cod. CB061GR)
Blue	CBC.2-10/PT (Ex)i (cod. CBI061)
Thickness	1.5 mm
<b>Cross-connection</b>	
Model A)	PTC/6/... (cod. PTC06...)
Model B)	-
Rated current carrying capacity IEC/ATEX	41 A / 35 A
Cross-connection identification strip	PTC/SP (cod. PTC0990)
Switchable cross-connection	-
Multiple cross-connection bar	-
Shunting screw and sleeve (Standard / Exe)	-
Protection cover	-
Coloured partition plate	DFU/4/R (cod. DU04R)
Cross-connection barrier	DFM/800 (cod. DF800) - DFM/900 (cod. DF900)
Test plug socket	-
Modular test plug	-
End section for modular test plug	-
<b>Marking</b>	
Single marking tag	CNU/8/51 (cod. NU0851S)
Single marking tag for pitch insertion	-
Warning plate	PRP/7/G (cod. PRP070G)
<b>End bracket</b>	
TH35 screw type	BT/3 (cod. BT003)
TH35 snap-fit type	BTO (cod. BT007)
TH35 and G32 snap-fit type	BTU (cod. BT005)
<b>Mounting rail</b>	
IEC 60715/TH35	PR/3/...
IEC 60715/G32	-
<b>APPROVALS AND MARKINGS</b>	
	



1 For more details on accessories, refer to the relevant chapters

## DESCRIZIONE DEL PRODOTTO

screw terminal block 1 level feed-through, 6 mm<sup>2</sup>, blue