


PHV1P U 5 36 (759 716)

- Easy transport due to detachable insulating stick

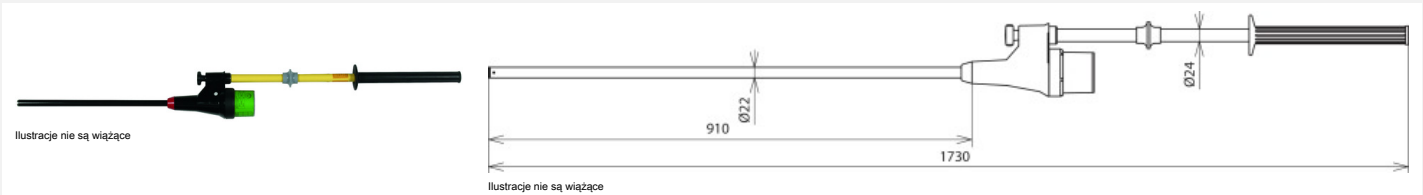

Typ	PHV1P U 5 36
Nr kat.	759 716
Nominal voltage (U _N)	5 ... 10 / 20 ... 36 kV
Type of voltage	a.c.
Frequency	50 Hz
Total length (l _o)	1730 mm
Insertion depth (l _i)	910 mm
Standard	EN/IEC 61481-1 (DIN VDE 0682-431-1)
Temperature range	-25 °C ... +55 °C, climatic category N
Design	Straight
For use at	▲
For	Indoor and outdoor installations
Design	Single-pole
Indication	Visual
Self-testing element	Yes
Battery	Lithium AA 1.5 Volt
Material (test prod)	Plastic
Material (indicator)	Plastic, fully insulated
Material (insulating stick)	Glass-fibre reinforced polyester tube
Waga	1,52 kg
Numer taryfy celnej (Nomenklatura scalona EU)	90303370
GTIN (EAN)	4013364259270
Jed. Op.	1 szt.

W związku z ciągłym rozwojem technicznym zastrzegamy sobie prawo wprowadzenia zmian parametrów technicznych, konfiguracji i technologii, wymiarów, wagi i materiałów. Przedstawione ilustracje nie są wiążące.