


PHE 3 20 S FU 1P (767 416)

- Easy transport due to detachable insulating stick

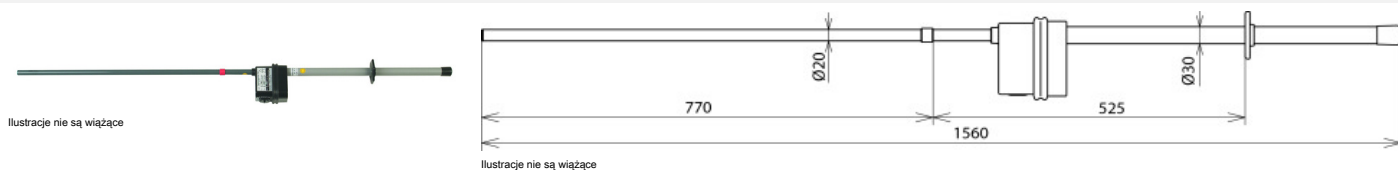

For three-phase systems and single-ended monophase switchgear installations

Typ	PHE 3 20 S FU 1P
Nr kat.	767 416
Nominal voltage (U _N)	3 ... 20 kV
Type of voltage	a.c.
Frequency	16.7 and 50 Hz
Total length (l _c)	1560 mm
Insertion depth (l _o)	770 mm
Insulating clearance (l _i)	525 mm
Length (test prod)	995 mm
Length of the operating stick (with hand guard)	665 mm
Standard	EN/IEC 61243-1 (DIN VDE 0682-411)
Temperature range	-25 °C ... +55 °C, climatic category N
Design	Complete
For use at	▲
For	Indoor and outdoor installations
Application	Switchgear installations and overhead lines
Design	Single-pole
Indication	Visual
Self-testing element	Yes
Material (test prod)	Glass-fibre reinforced epoxy resin tube
Material (test electrode)	Copper alloy/gal Sn
Material (indicator)	Plastic, fully insulated
Material (insulating stick)	Glass-fibre reinforced polyester tube
DB drawing No.	3 Ebgw 02.54
DB material No.	743 361
Waga	2,62 kg
Numer taryfy celnej (Nomenklatura scalona EU)	90303370
GTIN (EAN)	4013364084247
Jed. Op.	1 szt.

W związku z ciągłym rozwojem technicznym zastrzegamy sobie prawo wprowadzenia zmian parametrów technicznych, konfiguracji i technologii, wymiarów, wagi i materiałów. Przedstawione ilustracje nie są wiążące.