


SZ HH W20 1070 (765 050)

■ 20° angled operating head for HH fuses that are not easily accessible

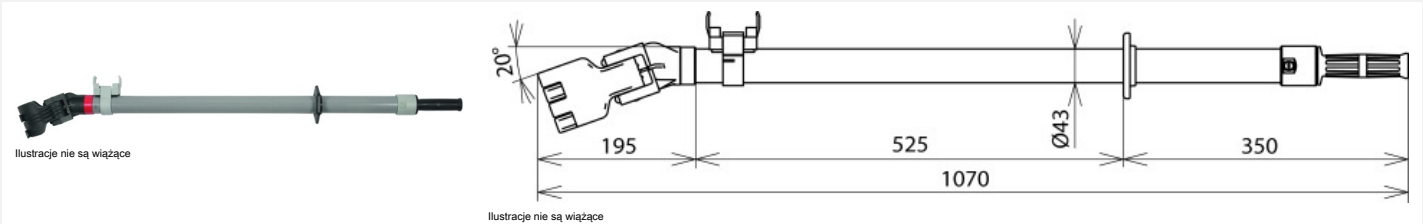

Typ Nr kat.	SZ HH W20 1070 765 050
Nominal voltage (U _N)	1 ... 36 kV
Clamping range	30 ... 50 ¹⁾ / 50 ... 90 mm
Total length (l _G)	1070 mm
Insulating clearance (l _i)	525 mm
Length (handle) (l _H)	350 mm
Insertion depth (l _o)	195 mm
Standard	DIN VDE V 0681-3
For use at	☼
For	Indoor and outdoor installations
Design	20° angled clamp body
Material (insulating stick)	Glass-fibre reinforced polyester tube
Material (operating head)	Glass-fibre reinforced polyamide
Material (reducing insert)	Polyamide
Material (adjustable handle)	Polyamide
Diameter	43 mm
Colour	Grey ☼
Anti-rotation plug-in coupling including end fitting	No
Type of device	Fuse tong
Waga	2,15 kg
Numer taryfy celnej (Nomenklatura scalona EU)	82055980
GTIN (EAN)	4013364093782
Jed. Op.	1 szt.

¹⁾ Only if used with reducing insert

W związku z ciągłym rozwojem technicznym zastrzegamy sobie prawo wprowadzenia zmian parametrów technicznych, konfiguracji i technologii, wymiarów, wagi i materiałów. Przedstawione ilustracje nie są wiążące.