


PHEG2 P SN7346 (767 639)

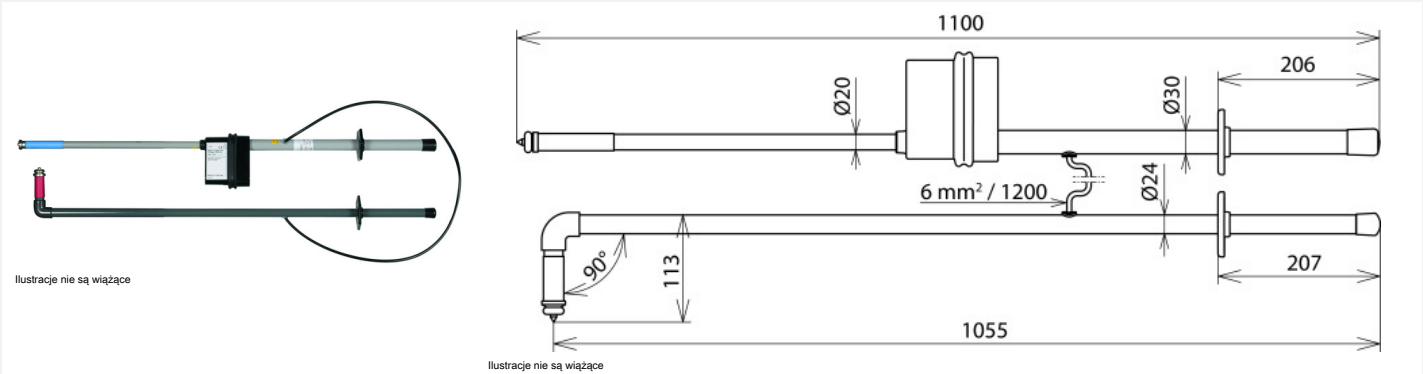

Typ	PHEG2 P SN7346
Nr kat.	767 639
Threshold voltage (U _t)	150 V
Nominal voltage (U _N)	750 V
Type of voltage	d.c.
Length (indicator with test prod) (l _s)	615 mm
Length (insulating stick) (l _i)	550 mm
Length (connecting cable)	1200 mm
Total length (l _g)	1100 mm
Standard	Based on EN/IEC 61243-1 (DIN VDE 0682-411)
Temperature range	-25 °C ... +55 °C, climatic category N
For use at	▲
For	Indoor and outdoor installations
Application	Switchgear installations
Design	Two-pole
Indication	Visual
Self-testing element	Yes
Material (test electrode)	Copper alloy/gal Sn
Material (test prod)	Glass-fibre reinforced polyester tube
Material (indicator)	Plastic, fully insulated
Material (insulating stick)	Glass-fibre reinforced polyester tube
Material (connecting cable)	Highly flexible copper cable
Waga	2,4 kg
Numer taryfy celnej (Nomenklatura scalona EU)	90303370
GTIN (EAN)	4013364155817
Jed. Op.	1 szt.

W związku z ciągłym rozwojem technicznym zastrzegamy sobie prawo wprowadzenia zmian parametrów technicznych, konfiguracji i technologii, wymiarów, wagi i materiałów. Przedstawione ilustracje nie są wiążące.