


PHE3S 20 S ZK (767 724)

■ Transport case included

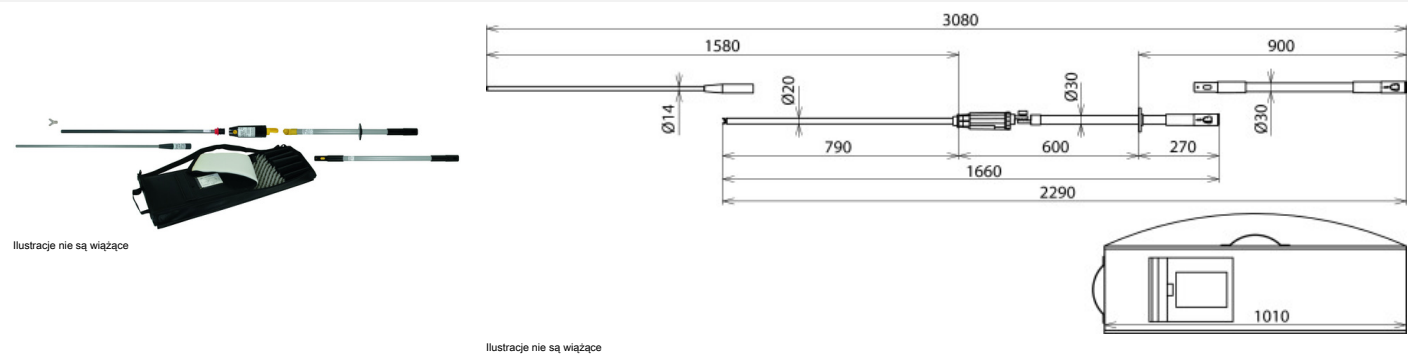

Typ	PHE3S 20 S ZK
Nr kat.	767 724
Nominal voltage (U _N)	20 kV
Type of voltage	a.c.
Frequency	50 Hz
Category	S
Total length (l _{G max})	3080 mm
Insertion depth (l _{O max})	1580 mm
Standard (indicator with test prod)	EN/IEC 61243-1 (DIN VDE 0682-411)
Standard (universal gear coupling)	EN/IEC 60832 (DIN VDE 0682-211)
Temperature range	-25 °C ... +55 °C, climatic category N
Design	Complete
For use at	Indoor and outdoor installations
For	Switchgear installations and overhead lines
Application	Single-pole
Design	Acoustic and visual
Indication	Yes
Self-testing element	Copper alloy/gal Sn
Material (test electrode)	Glass-fibre reinforced epoxy resin tube
Material (test prod)	Plastic, fully insulated
Material (indicator)	Glass-fibre reinforced polyester tube
Material (insulating stick)	4,22 kg
Waga	90303370
Numer taryfy celnej (Nomenklatura scalona EU)	4013364125902
GTIN (EAN)	1 szt.
Jed. Op.	

W związku z ciągłym rozwojem technicznym zastrzegamy sobie prawo wprowadzenia zmian parametrów technicznych, konfiguracji i technologii, wymiarów, wagi i materiałów. Przedstawione ilustracje nie są wiążące.