


PHE3S 20 L ZK (767 725)

■ Transport case included

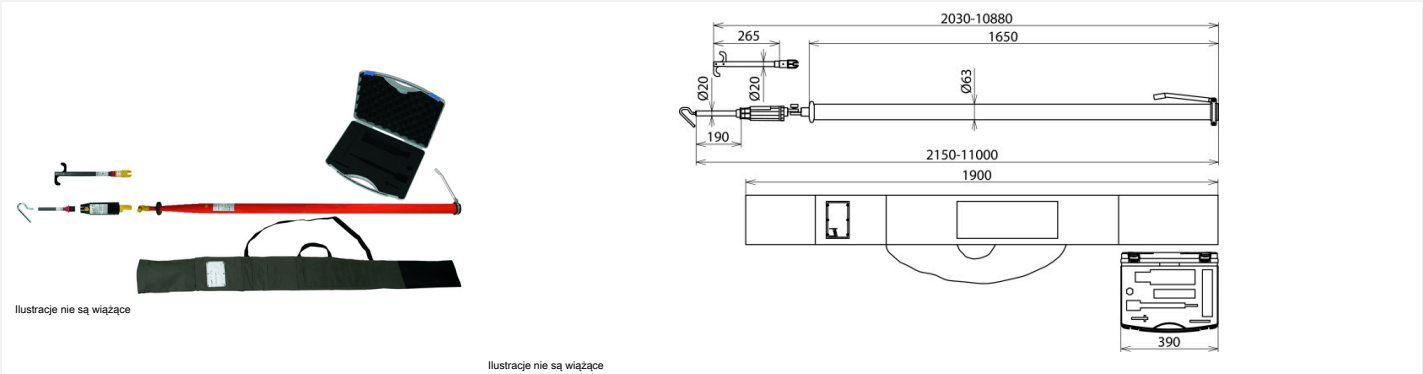

Typ Nr kat.	PHE3S 20 L ZK 767 725
Nominal voltage (U _N)	20 kV
Type of voltage	a.c.
Frequency	50 Hz
Category	L
Total length (l _{G max} / l _{G min})	11000 / 2150 mm
Insertion depth (l _O)	190 mm
Standard (indicator with test prod)	EN/IEC 61243-1 (DIN VDE 0682-411)
Standard (universal gear coupling)	EN/IEC 60832 (DIN VDE 0682-211)
Temperature range	-25 °C ... +55 °C, climatic category N
Design	Complete
For use at	☀
For	Indoor and outdoor installations
Application	Overhead lines
Design	Single-pole
Indication	Acoustic and visual
Self-testing element	Yes
Material (test electrode)	Copper alloy/gal Sn
Material (test prod)	Glass-fibre reinforced epoxy resin tube
Material (indicator)	Plastic, fully insulated
Material (insulating stick)	Glass-fibre reinforced polyester tube
Waga	9,1 kg
Numer taryfy celnej (Nomenklatura scalona EU)	90303370
GTIN (EAN)	4013364125919
Jed. Op.	1 szt.

W związku z ciągłym rozwojem technicznym zastrzegamy sobie prawo wprowadzenia zmian parametrów technicznych, konfiguracji i technologii, wymiarów, wagi i materiałów. Przedstawione ilustracje nie są wiążące.