


PHE3S 110 132 S (767 131)

- Easy transport due to detachable test prod and modular insulating stick

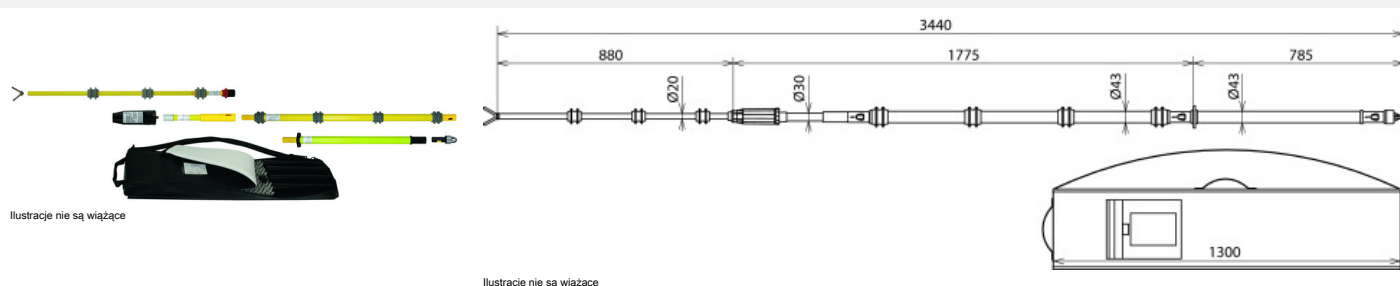

For 50 Hz three-phase systems and 16.7 Hz centre-earthed monophas traction power lines
Range does not have to be switched

Typ Nr kat.	PHE3S 110 132 S 767 131
Nominal voltage (U _N)	110 ... 132 kV
Type of voltage	a.c.
Frequency	50 and 16.7 Hz
Category	S
Total length (l _σ)	3440 mm
Insertion depth (l _o)	880 mm
Standard	EN/IEC 61243-1 (DIN VDE 0682-411)
Temperature range	-25 °C ... +55 °C, climatic category N
Design	Complete
For use at	▲
For	For indoor and outdoor installations
Application	Switchgear installations and overhead lines
Design	Single-pole
Indication	Acoustic and visual
Self-testing element	Yes
Material (test electrode)	Copper alloy/gal Sn
Material (test prod)	Glass-fibre reinforced epoxy resin tube
Material (indicator)	Plastic, fully insulated
Material (insulating stick)	Glass-fibre reinforced polyester tube
DB drawing No.	3 Eku 710 001
DB material No.	01 101 358
Waga	6,2 kg
Numer taryfy celnej (Nomenklatura scalona EU)	90303370
GTIN (EAN)	4013364139411
Jed. Op.	1 szt.

W związku z ciągłym rozwojem technicznym zastrzegamy sobie prawo wprowadzenia zmian parametrów technicznych, konfiguracji i technologii, wymiarów, wagi i materiałów. Przedstawione ilustracje nie są wiążące.