


PHE3 U 3 30 S (767 733)

- Easy transport due to detachable insulating stick (M12) and test prod
- Insulating stick with plug-in coupling for extending the handle

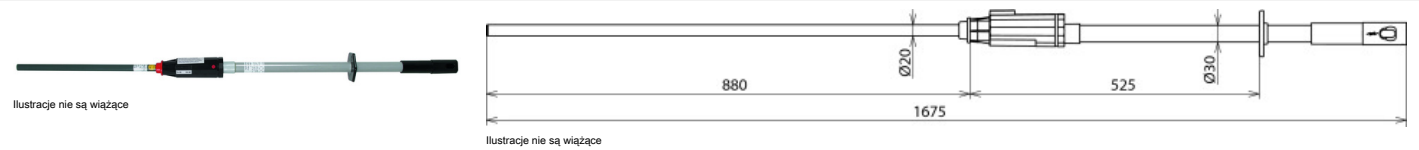

Typ	PHE3 U 3 30 S
Nr kat.	767 733
Nominal voltage (U _N)	3 ... 10 / 10 ... 30 kV
Type of voltage	a.c.
Frequency	50 Hz
Category	S 64
Total length (l _G)	1675 mm
Insertion depth (l _O)	880 mm
Length (indicator with test prod)	1050 mm
Standard	EN/IEC 61243-1 (DIN VDE 0682-411)
Temperature range	-25 °C ... +55 °C, climatic category N
Design	Complete
For use at	
For	Indoor and outdoor switchgear installations
Application	Switchgear installations and overhead lines
Design	Single-pole
Indication	Acoustic and visual
Self-testing element	Yes
Material (test electrode)	Copper alloy/gal Sn
Material (test prod)	Glass-fibre reinforced epoxy resin tube
Material (indicator)	Plastic, fully insulated
Material (insulating stick)	Glass-fibre reinforced polyester tube
Waga	1,29 kg
Numer taryfy celnej (Nomenklatura scalona EU)	90303370
GTIN (EAN)	4013364070882
Jed. Op.	1 szt.

W związku z ciągłym rozwojem technicznym zastrzegamy sobie prawo wprowadzenia zmian parametrów technicznych, konfiguracji i technologii, wymiarów, wagi i materiałów. Przedstawione ilustracje nie są wiążące.