


PHE3 6 20 S ZK (767 951)

- Easy transport due to detachable insulating stick (ZK) and test prod
- Insulating stick with plug-in coupling for extending the handle

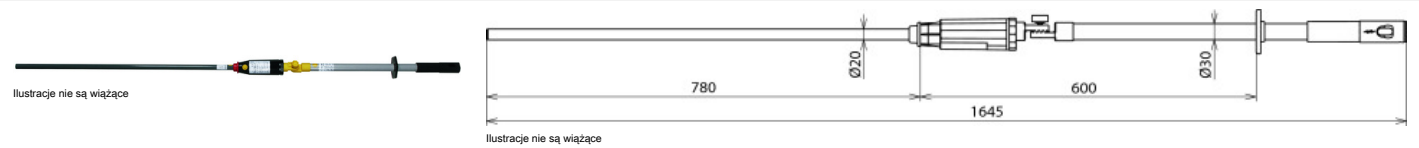

| Typ                                           | PHE3 6 20 S ZK                              |
|-----------------------------------------------|---------------------------------------------|
| Nr kat.                                       | 767 951                                     |
| Nominal voltage (U <sub>N</sub> )             | 6 ... 20 kV                                 |
| Type of voltage                               | a.c.                                        |
| Frequency                                     | 50 Hz                                       |
| Category                                      | S 63                                        |
| Total length (l <sub>G</sub> )                | 1645 mm                                     |
| Insertion depth (l <sub>O</sub> )             | 780 mm                                      |
| Length (indicator with test prod)             | 1010 mm                                     |
| Standard                                      | EN/IEC 61243-1 (DIN VDE 0682-411)           |
| Temperature range                             | -25 °C ... +55 °C, climatic category N      |
| Design                                        | Complete                                    |
| For use at                                    |                                             |
| For                                           | Indoor and outdoor installations            |
| Application                                   | Switchgear installations and overhead lines |
| Design                                        | Single-pole                                 |
| Indication                                    | Acoustic and visual                         |
| Self-testing element                          | Yes                                         |
| Material (test electrode)                     | Copper alloy/gal Sn                         |
| Material (test prod)                          | Glass-fibre reinforced epoxy resin tube     |
| Material (indicator)                          | Plastic, fully insulated                    |
| Material (insulating stick)                   | Glass-fibre reinforced polyester tube       |
| Waga                                          | 1,26 kg                                     |
| Numer taryfy celnej (Nomenklatura scalona EU) | 90303370                                    |
| GTIN (EAN)                                    | 4013364134799                               |
| Jed. Op.                                      | 1 szt.                                      |

W związku z ciągłym rozwojem technicznym zastrzegamy sobie prawo wprowadzenia zmian parametrów technicznych, konfiguracji i technologii, wymiarów, wagi i materiałów. Przedstawione ilustracje nie są wiążące.