


PHE3 6 20 SL (767 740)

- Easy transport due to detachable insulating stick (M12) and test prod
- Insulating stick with plug-in coupling for extending the handle

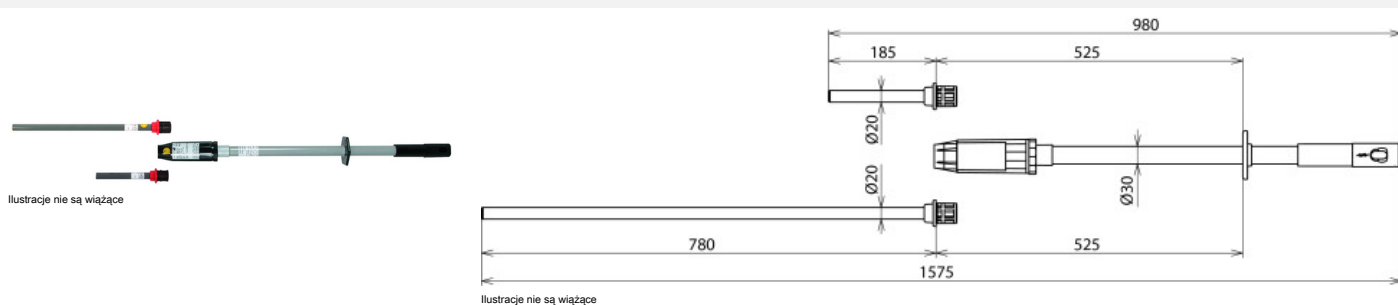

Typ	PHE3 6 20 SL
Nr kat.	767 740
Nominal voltage (U _N)	6 ... 20 kV
Type of voltage	a.c.
Frequency	50 Hz
Category	S 63 / L 71
Total length (l _G)	1575 / 980 mm
Insertion depth (l _O)	780 / 185 mm
Length (indicator with test prod)	950 / 370 mm
Standard	EN/IEC 61243-1 (DIN VDE 0682-411)
Temperature range	-25 °C ... +55 °C, climatic category N
Design	Complete
For use at	▲
For	Indoor and outdoor installations
Application	Switchgear installations and overhead lines or overhead lines
Design	Single-pole
Indication	Acoustic and visual
Self-testing element	Yes
Material (test electrode)	Copper alloy/gal Sn
Material (test prod)	Glass-fibre reinforced epoxy resin tube
Material (indicator)	Plastic, fully insulated
Material (insulating stick)	Glass-fibre reinforced polyester tube
Waga	1,45 kg
Numer taryfy celnej (Nomenklatura scalona EU)	90303370
GTIN (EAN)	4013364071063
Jed. Op.	1 szt.

W związku z ciągłym rozwojem technicznym zastrzegamy sobie prawo wprowadzenia zmian parametrów technicznych, konfiguracji i technologii, wymiarów, wagi i materiałów. Przedstawione ilustracje nie są wiążące.