


SLI035078NW_PW

SLI035078NW_PW

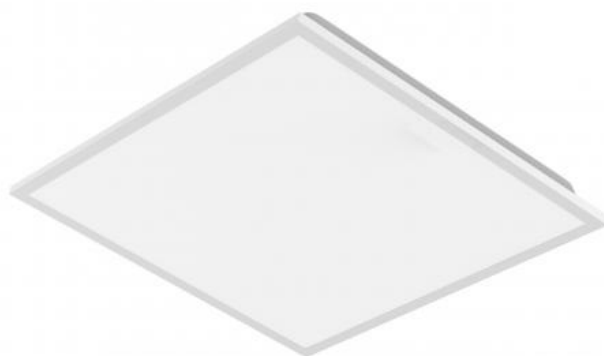


Power	40 W	Voltage	230 V
Luminous flux*	5000 lm (360°)	Colour temperature	4000 K
Colour of light	Neutral white	Beam angle	120 °
Degree of protection (IP)	IP20		

Technical data


Code	SLI035078NW_PW
Power	40 W
Nominal current	175 mA
Voltage	230 V
Energy consumption	40 kWh/1000h
Frequency	50HZ Hz
Protection class	II
Power supply included	+
Power factor	0.9
Useful luminous flux*	5000 lm (360°)
Luminous flux**	4600 lm (360°)
Lamp efficacy	125 lm/W
Colour temperature	4000 K
Colour of light	Neutral white
Beam angle	120 °
RA	>80
Uniformity of color SDCM max	5
Dimmable	OPC
Working temperature range	-20/+40 °
Lifespan	50000 h
Housing material	Steel/PS
Degree of protection (IP)	IP20
Colour	White
Dimension (AxBxC)	595x595x33 mm
Mounting hole	575x575 mm
For use	Inside
Assembly method	On the ceiling, Recessed
Application	INT
Made in	PRC

Related documents



 User manual



 Declaration of Conformity