
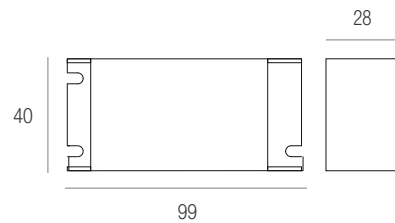


ZASILACZ OPRAW LED

ZOL 40

12 V

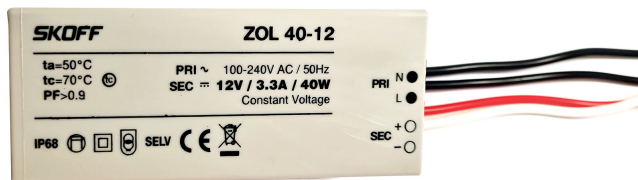

Specifications • Parametry techniczne • Technische Parameter



| | | | | | | | | |
|-----------------------|----------------------|---------|------|-------|------|------|----|-------|
| ZL-040-D-1-4-WH-ML-01 | 100-240 V AC / 50 Hz | 12 V DC | 40 W | > 0,9 | - 20 | + 50 | 68 | 0,143 |
|-----------------------|----------------------|---------|------|-------|------|------|----|-------|

| Use | Zastosowanie | Verwendung |
|---|---|--|
| Constant voltage LED power unit. | Zasilacz opraw LED o stabilizacji napięciowej. | Mit Montageschrauben mit Spreizdübel |
| Further information | Informacje dodatkowe | Zusätzliche Angaben |
| Ambient temp. (MAX): 50 C° Enclosure temp. (MAX): 70 C° Output wires: YES, 14 cm Safeguards: short-circuit protection, overload protection Warranty: 36 months | Temp. otoczenia (MAX): 50 C° Temp. obudowy (MAX): 70 C° Wyrowadzone przewody: TAK, 14 cm Zabezpieczenia: przeciwzwarciowe, przeciążeniowe Gwarancja: 36 miesięcy | Umgebungstemperatur (MAX): 50 C° Gehäusetemperatur (MAX): 70 C° Ausgeführte Leitungen: JA, 14 cm Sicherungen: gegen Kurzschluss, gegen Überlastun Garantie: 36 Monate |

Regulatory compliance • Zgodność z normami

Konformität mit den Normen

PN EN 61347-1:2015-09 (2014/35/EU)
 PN EN 61347-2-13:2015-04 (2014/35/EU)
 PN EN 61547:2009 (2014/30/EU)
 PN EN 55015:2019-11 (2014/30/EU)
 PN EN 61558-1:2009 (2014/35/EU)
 PN EN 61558-2-6:2009 (2014/35/EU)
 PN EN 50581:2013-03 (2011/65/EU)
 PN EN 61000-3-3:2013-10/A1:2019-10 (2014/30/EU)
 PN EN 61000-3-2:2019-04 (2014/30/EU)
 PN EN 61000-4-2:2019 (2014/30/EU)
 PN EN 61000-4-3:2021-06 (2014/30/EU)
 PN EN 61000-4-4:2010 (2014/30/EU)
 PN EN 61000-4-5:2014-10/11:2018-01 (2014/30/EU)
 PN EN 61000-4-6:2014-04 (2014/30/EU)