



LED SMD


Оправа typu downlight LED
LED downlight fixture
Светильник типа downlight LED

ROUNDA N LED 24W

LED
technology



ROUND LED...w

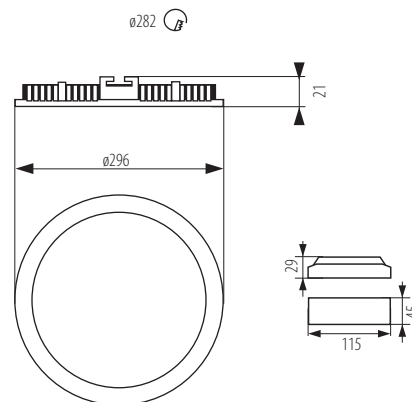

ROUND LED...SR



ROUND LED...SN

220-240V~
50/60Hz

[°]
110



[h]
20000 h

≥15000

2 x 0,75mm²
5 cm

IP
44/20



ERC

CE

Kanlux



Tc [K]
ELIPSE
≤ 6x MacAdam



Model	Code	Finish	Power [W]	Beam Angle [°]	Beam Diameter [mm]
ROUND N LED24W-WW-SN	22509	nikiel satynowy satin nickel / сатиновый никель	24	3000	1600
ROUND N LED24W-WW-SR	25844	srebrny / silver / серебряный	24	3000	1600
ROUND N LED24W-WW-W	25845	biały / white / белый	24	3000	1600
ROUND N LED24W-NW-SN	22508	nikiel satynowy satin nickel / сатиновый никель	24	4000	1700
ROUND N LED24W-NW-SR	25842	srebrny / silver / серебряный	24	4000	1700
ROUND N LED24W-NW-W	25843	biały / white / белый	24	4000	1700



PL

obudowa: stop aluminium / klosz: tworzywo sztuczne

zasilacz w komplecie

GB

casing: aluminium alloy / diffuser: plastic

power supply unit included

RUS

корпус: листовая сталь / плафон: пластик

источник питания в комплекте