

# TAŚMA LED 12V / SMD 3528 - 300 / IP20

## LED STRIPS 12V / SMD 3528 - 300 / IP20



### PRODUKTY UZUPEŁNIAJĄCE ADDITIONAL PRODUCTS

art.no: DIMMER 2.4G 4-ZONES ROTATING WHEEL RF


art.no: DIMMER 2.4G RECEIVER SINGLE COLOR



art.no: PS-MOD-100W12V8.33A



3528

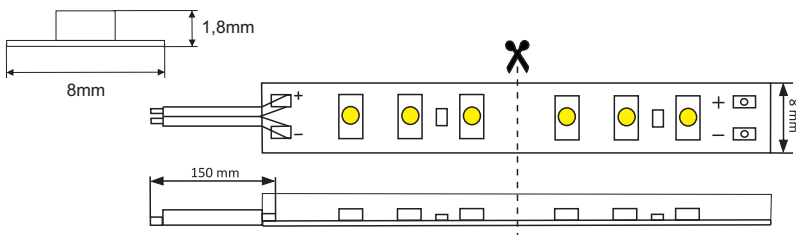

	LS5300WW -G_WB	LS5300NW -G_WB	LS5300W -G_WB
	5908293900876	5908293904119	5908293900852
	20	20	20
	24W (4,8W/m)	24W (4,8W/m)	24W (4,8W/m)
	2A (0,4A/m)	2A (0,4A/m)	2A (0,4A/m)
	12V DC	12V DC	12V DC
	4lm/led	5lm/led	5lm/led
	2700-3500K	4000-4500K	6000-7000K
	3528	3528	3528
	300 (60led/m)	300 (60led/m)	300 (60led/m)
	120°	120°	120°
	5m	5m	5m
	8mm	8mm	8mm
	2m*	2m*	2m*
<b>PCB</b>	<b>Podwójne Double</b>	<b>Podwójne Double</b>	<b>Podwójne Double</b>
	30000h	30000h	30000h
	-10/+30	-10/+30	-10/+30

\*Odległość pomiędzy punktami zasilania na taśmie gwarantująca minimalne spadki napięcia i optymalne parametry świecenia

\*The distance between the power supply points of the LED strip which ensures minimum voltage drop and optimum lighting parameters is 2m

