

# TAŚMA LED 12V / SMD 3528 - 300 / IP65

## LED STRIPS 12V / SMD 3528 - 300 / IP65

# PREMIUM




### PRODUKTY UZUPEŁNIAJĄCE ADDITIONAL PRODUCTS

art.no: DIMMER 2.4G 4-ZONES ROTATING WHEEL RF

art.no: DIMMER 2.4G RECEIVER SINGLE COLOR



art.no: PS-M-36W12V3.0A

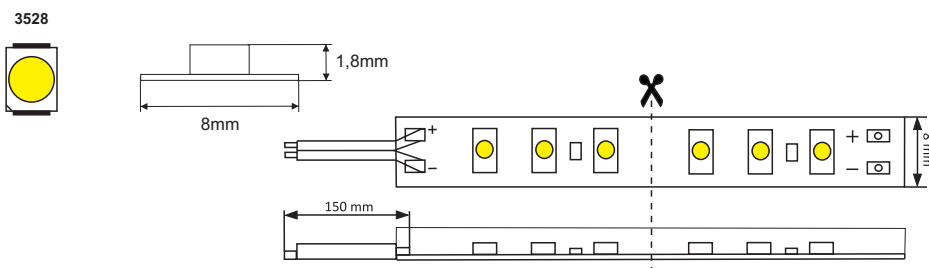

	LS5300WW _WB_EX	LS5300NW _WB_EX	LS5300W _WB_EX
	5908293906465	5908293913364	5908293906458
	65	65	65
	24W (4,8W/m)	24W (4,8W/m)	24W (4,8W/m)
	2A (0,4A/m)	2A (0,4A/m)	2A (0,4A/m)
	12V DC	12V DC	12V DC
	5lm/led	6lm/led	6lm/led
	3000-3300K	4000-4500K	6000-6500K
	3528	3528	3528
	300 (60led/m)	300 (60led/m)	300 (60led/m)
	120°	120°	120°
	5m	5m	5m
	8mm	8mm	8mm
	2,5m*	2,5m*	2,5m*
<b>PCB</b>	Podwójne Double	Podwójne Double	Podwójne Double
	50000h	50000h	50000h
	-30/+45	-30/+45	-30/+45

\*Odległość pomiędzy punktami zasilania na taśmie gwarantująca minimalne spadki napięcia i optymalne parametry świecenia

\*The distance between the power supply points of the LED strip which ensures minimum voltage drop and optimum lighting parameters is 2,5m

