


## PHE4 60 132 S (783 280)

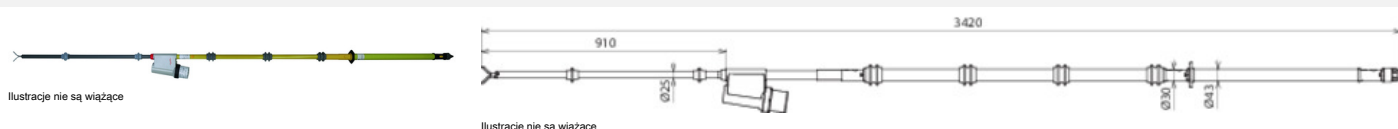

| Typ   | PHE4 60 132 S  |
|---|--|
| Nr kat.                                       | 783 280  |
| Nominal voltage (U <sub>N</sub> )             | 60 ... 132 kV  |
| Type of voltage                               | a.c.   |
| Frequency                                     | 50 Hz  |
| Category                                      | S  |
| Total length (l <sub>Σ</sub> )                | 3420 mm  |
| Insertion depth (l <sub>o</sub> )             | 910 mm   |
| Length (handle) (l <sub>h</sub> )             | 780 mm   |
| Standard                                      | EN/IEC 61243-1 (DIN VDE 0682-411)                            |
| Temperature range                             | -25 °C ... +70 °C, climatic category N and W                 |
| Design  | Complete   |
| For use in wet weather conditions             | Yes  |
| For   | Indoor and outdoor installations                             |
| Application                                   | Switchgear installations and overhead lines                  |
| Design  | Single-pole  |
| Indication                                    | Acoustic and visual  |
| Sound level                                   | > 67 dB(A) (visual indication and intermittent sound signal) |
| Self-testing element *)                       | yes  |
| Battery                                       | Lithium AA 1.5 Volt  |
| Material (test electrode)                     | Copper alloy/gal Sn  |
| Material (test prod)                          | Glass-fibre reinforced epoxy resin tube                      |
| Material (indicator)                          | Plastic, fully insulated                                     |
| Material (insulating stick)                   | Glass-fibre reinforced polyester tube                        |
| Diameter (insulating stick)                   | 30 mm  |
| Waga  | 3,31 kg  |
| Numer taryfy celnej (Nomenklatura scalona EU) | 90303370   |
| GTIN (EAN)                                    | 4013364317284  |
| Jed. Op.                                      | 1 szt.   |

\*) all circuits without test prod

W związku z ciągłym rozwojem technicznym zastrzegamy sobie prawo wprowadzenia zmian parametrów technicznych, konfiguracji i technologii, wymiarów, wagi i materiałów. Przedstawione ilustracje nie są wiążące.